ACCESS CONTROL

Door Panels & Accessories
Software
Locking Hardware
Exit Devices
Keypads
Proximity Readers & Credentials
Smart Readers & Credentials
Biometrics
Video Badging
Telephone Entry & Gate Controllers
Access Control Power

ACCESS CONTROL LINE CARD

(OI) Accutech-Innovative Cntrl Sys
(F5) Actuator Systems
(R8) Adams Rite
(AC) Alarm Controls
(AX) Altronix
(AH) AWID
(BP) Boonedam / Tomsed
(CM) Camden Door Controls
(CV) CDVI
(O2) Chamberlain / Sentex
(ZE) Cypress Computer Systems
(DM) Dell OEM Powered
(D2) Designed Security, Inc. (DSI)
(DE) Detex
(DY) Dynalock Corp.
(EX) Essex Electronics
(6D) Falcon / Door-O-Matic
(FX) Fargo
(HE) Hanchett Entry Systems (HES)
(HU) HID
(NC) Honeywell Access Systems
(IE) IEI / Linear
(JC) Infinias
(K6) Interlogix/TruPortal
(JM) Jam Plastics
(KF) Keri Systems
(CQ) Keyscan
(KT) Kwikset
(4N) LCN
(O2) LiftMaster
(LN) Linear Corp.
(LC) Locknetics
(MI) Mircom
(0M) MorphoTrak
(2N) Nedap
(Y9) Norton Door Controls
(PI) Pach & Company
(JW) Prodatakey
(RU) R.C.I. (Rutherford Controls, Inc.)
(RW) Recognition Systems
(SF) Safety Technology Int'l., Inc.
(BV) Safran Morpho/Bioscrypt, Inc.
(0T) Sargent
(6S) Schlage Electronics
(KG) Schlage Wireless
(ST) Secura Key
(SN) Securitron
(SZ) Security Door Controls (SDC)
(IS) Stanley Healthcare Solutions
(7S) Stanley Pac
(F7) Stanley Security Products
(BS) Suprema
(UE) Ultra Magic Card
(VT) Viscount
(VS) Visonic
(VN) Von Duprin
(XF) Xceedid
(2Y) Yale Residential
(YH) Yale Commercial

1.800.233.6261
www.adiglobal.com/us

New Vendor

* As of June 2014

CYPRESS
INTEGRATION SOLUTIONS

Generate higher profits and trim installation time with Cypress' Integration Solutions for physical and logical access control systems.

Synchronized LCD Time Display

- One (1) inch LCD serial interface time display
- Synchronize with Access Panel
- May require CCX Clock driver

ZE-CCK1401

Multi-Format Databender™

- Multi-format data converter
- Convert Wiegand reader to Serial format
- Convert Serial device to Wiegand format
- Modify Wiegand format output

ZE-CVX1300

Suprex® Ethernet Wiegand Extender

- Wired Ethernet Extender - LAN or WAN
- Supports single reader and door or gate controls
- Expandable with ZE-EXP2000
- Includes remote (reader) and central (panel) units

ZE-SPX7200

Suprex® Card Reader Extender

- Two conductor Wiegand extender
- Up to 10,000' from panel to reader
- Supports Reader and Door or Gate controls
- Includes remote and central units

ZE-SPX1300

Suprex® Wireless Reader Extender

- 900 MHz Wireless Extender
- 10,000' LOS range
- Supports Single Reader and Door or Gate controls
- Expandable with EXP-2000
- Includes remote and central units

ZE-SPX5521

Suprex® Wireless Reader Extender

- 2.4 GHz Wireless wiegand door interface. Can be expanded for additional Wiegand readers (requires ZE-EXP-2000).
- Supports Single reader and door or gate hardware with GPIO
- Includes Remote/reader unit and Central/ Panel unit. Requires 12VDC.

ZE-SPX5601

- 1,500' range

ZE-SPX5621

- 7,000' range

Suprex® Fiber Optic Reader Extender

- Fiber Optic Wiegand Door interface. Single or Multimode Fiber.
- Supports Single reader and door or gate hardware with GPIO
- Can be expanded for additional Wiegand readers (requires ZE-EXP-2000). Includes Remote/reader unit and Central/ Panel unit.
- Requires 12VDC

ZE-SPX7400

- Multimode

ZE-SPX7410

- Single mode

Wiegand Keyboard Wedge

- USB Wiegand interface
- MAC OSX or Windows Compatible. Programmable.

ZE-WDG5912

Portable Handheld Card Reader

- 2.4 GHz Portable Handheld Card Reader. Supports 13.56 Mhz HID iClass, Mifare. Supports 125 kHz HID Prox, AWID Prox and Farpointe Prox.
- NiMH Rechargeable battery capable - includes charger
- Includes Belt Holster and Base Unit Wiegand Interface
- 300' LOS range (Repeaters available to extend range)

ZE-WMR2230

ZE-WMR2130

Honeywell

NetAXS® Web Based Access Control

- Provides solutions for installations of any size
- Enables users to manage their system anywhere there's an internet connection – with no dedicated PC costs
- User friendly design makes it simple to install and easy to operate and maintain
- Superior scalability means you can purchase the exact amount of access control you need now and in the future

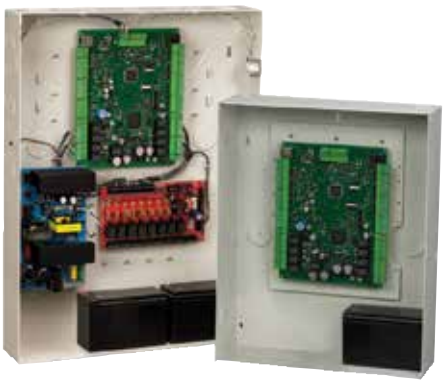

NetAXS-123

NC-NX1P

- One door control panel, (compact plastic) enclosure with tamper switch-PoE or externally powered

NC-NX1MPS

- One door control panel, standard (metal) enclosure with tamper switch and terminal block. Includes 4A, 12VDC output/100-240VAC input power supply and 12V, 7AH battery

NC-NXD1

- One door add-on board (Adds 1 door to your existing 1-door system = 2 doors)

NC-NXD2

- NetAXS-123: Two door add-on board (Adds 2 doors to your existing 1-door system = 3 doors)

NetAXS-4

NC-NX4S1

- 4-door control panel
- Includes NetAXS controller, standard (metal) enclosure, suppressor, wall adapter power supply and 7 A battery

NC-NX4L1

- 4-door control panel, deluxe (metal) enclosure
- Includes: NetAXS controller, deluxe enclosure, fire alarm interlock fused output module, backup battery, 24VDC 6A built-in power supply and power for up to four door locks – everything you need to power the system

NC-NX4OP30S

- NC-NX4S1 control panel with (4) NC-OP30HON OmniProx Readers

NC-NX4OP40S

- NC-NX4S1 control panel with (4) NC-OP40HON OmniProx Readers

NC-NX4OP30L

- NC-NX4L1 control panel with (4) NC-OP30HON OmniProx Readers

NC-NX4OP40L

- NC-NX4L1 control panel with (4) NC-OP40HON OmniProx Readers

ADI
YOUR BUSINESS DESERVES MORE

More Support

Centaur®

INTEGRATED ACCESS CONTROL

will overcome any access control challenge

CENTAUR Integrated Access Control System offers you a complete access control solution. From a single door system to a complex multi-site installation with numerous card holders, CENTAUR is geared to perform and gives you a level of flexibility never seen in the industry.

Access privileges can be modified on-line in real-time without issuing new cards. Visitors can be granted access privileges in seconds, for temporary access situations. Enhanced supervision. Track specific individuals, and get daily reports on their movements. Monitor traffic in highly sensitive areas for maximum security.

CENTAUR grows with you as the needs of your facility evolve, CENTAUR can easily be expanded to conquer any access control challenge.

Main Features	
Up to 2048 doors per site (64 sites)	✔
DVR Integration (Milestone, Exact, etc.)	✔
Visitor Management	✔
Parking Management	✔

CDVI

The Installer's Choice

- ✓ 5 Year Warranty
- ✓ Technical Support available from 8am to 8pm (ET)
- ✓ FREE design and consulting assistance
- ✓ FREE Training on demand

NEW

CV-2DMKIP 2-Door IP Controller Kit

NEW

CV-2DEKIT 2-Door Expander Kit

Contact our Systems Sales & Support Team at **1-800-234-7971**
to customize your system and provide complete systems integration support.

Shopping List

- ☐ CENTAUR CV-CTV900A
  2-DOOR CONTROLLER
- ☐ CENTAUR CV-CAA470A
  2-DOOR EXPANDER
- ☐ CENTAUR CV-2DMKIP
  2-DOOR IP CONTROLLER KIT WITH TWO CV-DGLPFNWL2 READER
- ☐ CENTAUR CV-2DEK
  2-DOOR EXPANDER KIT WITH TWO CV-DGLPFNWL2 READER
- ☐ CENTAUR CV-2DMKIPLT
  2-DOOR CONTROLLER KIT WITH IP CONVERTER & TRANSFORMER
- ☐ CENTAUR CV-2DMKUSBLT
  2-DOOR CONTROLLER KIT WITH USB CONVERTER & TRANSFORMER
- ☐ CV-CAA480A
  CENTAUR ELEVATOR CONTROLLER
- ☐ CV-CAETHRA
  IP MODULE CONVERTER
- ☐ CV-CA360USBC
  USB MODULE CONVERTER

ADI
YOUR BUSINESS DESERVES MORE

More Support

ATRIUM
ACCESS CONTROL

CDVI

The Installer's Choice

- ✓ 5 Year Warranty
- ✓ Technical Support available from 8am to 8pm (ET)
- ✓ FREE design and consulting assistance
- ✓ FREE Training on demand

ATRIUM products are inexpensive, very easy to install, configure and implement (up to 10 door system). They are plug and play and user friendly. Indeed, the various system modules are designed to be detected automatically by the main controller.

In addition, ATRIUM incorporates a plug-in power supply for the main controller and expansion modules, supplying power to locking devices and accessories. No other manufacturer offers such preconfigured access control systems.

Furthermore, ATRIUM supports quick and secure communication with any computer, tablet or smart phone. It also offers a unique, quick and easy card enrollment mode (adding and deleting cards) without using a computer.

NEW

CV-AC22KITB 2-Door IP Controller Kit

NEW

CV-AX22KITB 2-Door Expander Kit

Main Features	
Embedded Web Server	✔
Pre-assembled universal power supply (120V / 240V)	✔
Auto-detect hardware modules	✔
FREE Management Software	✔

Contact our Systems Sales & Support Team at **1-800-234-7971**
to customize your system and provide complete systems integration support.

Shopping List

- ☐ ATRIUM CV-AC22
  2-DOOR IP CONTROLLER
- ☐ ATRIUM CV-AX22
  2-DOOR EXPANDER
- ☐ ATRIUM CV-AC22KITB
  2-DOOR IP CONTROLLER KIT INCLUDING TWO CV-NANOPB
- ☐ ATRIUM CV-AX22KITB
  2-DOOR EXPANDER KIT INCLUDING TWO CV-NANOPB
- ☐ ATRIUM CV-AC22KITSTB
  2-DOOR IP CONTROLLER KIT INCLUDING TWO CV-STARPB
- ☐ ATRIUM CV-AX22KITSTB
  2-DOOR EXPANDER KIT INCLUDING TWO CV-STARPB
- ☐ CV-NANOPB
  CDVI MINI PROXIMITY CARD READER
- ☐ CV-STARPB
  CDVI MULLION MULTI-TECHNOLOGY PROXIMITY CARD READER
- ☐ CV-SOLARKPB
  CDVI MULTI-TECHNOLOGY PROXIMITY CARD READER & KEYPAD

CDVI

Centaur 2-Door Master Kit with USB Converter

- 1 x CT-V900-A with metal box and CDVI150 transformer
- 2 x DGLP FN WLC26 proximity readers
- 1 x 16-Door Lite Centaur Software
- 1 x USB Cable

CV-2DMKUSB (2DMKUSB)

CDVI

ATRIUM 2-Door Master Kit

- Embedded web server
- On board 750 mA power supplied to each lock output
- Includes 2 readers and 15 cards
- Multiple door access

CV-AC22KITB (AC22KITB)

CDVI

Wiegand Wireless Receiver

- For gates and condos
- Compatible with any 26 bit Wiegand-capable systems
- Range up to 200 m (650 ft.)
- Power requirements: 12 or 24V (AC or DC)

CV-WRW (WRW)

CDVI

Stand Alone Wireless Receiver with 2 Relays

- Up to 85 transmitter keys
- 1 NO relay + 1 NO/NC relay (24VA)
- Self-learning memorization
- Pulsed, latched or timed relay output

CV-WR2 (WR2)

CDVI

1, 2 or 4-Channel Mini Transmitter

- Heavy-duty construction
- Elegant & easy to carry
- Available with HID and CDVI tag
- Available with 1, 2 or 4 buttons

CV-R1 (R1)
CV-R2 (R2)
CV-R4 (R4)

Honeywell

Suppressor Kit

- Protects against electrical spikes collapsing electrical fields. Required for electrical switching devices that connect through relay contact on N-1000-II, N-1000-III, N-1000-IV, NS2, NS2+, NetAXS-123.

NC-S4 (S-4)

Door Panels & Accessories

Prox.Pad Plus Access System

- Software managed access control for entry level applications
- Integrated door control, proximity reader and keypad
- Network up to 32 prox. pad plus doors
- Software w/free lifetime upgrades, setup wizards and video tutorials

IE-PROXPADPS (0-205679)

Max 3 Single Door Access Control System

- Includes control, prox. reader, software and power supply. Network up to 64 Max3/MiniMax3 doors.
- Add com. module, cards & lock hardware for complete system. Easily add doors with Max 3 expansion kit.

IE-MAX3SYS (0-205600F)

Plug-in Power Supply

- EISA compliant
- Auto-resetting poly fuse
- 120VAC input
- 12VDC output @ 2000 mA (2 Amps) maximum

IE-PIP12VDCR (0-291312RU)

Plug-in Power Supply

- EISA compliant
- Auto-resetting poly fuse
- 120VAC input
- 24VDC output @ 1000 mA (1 Amp) maximum

IE-PIP24VDCR (0-291324RU)

truPortal Access Control 2-Door Base System

- TruPortal Base System Controller enclosure w/ integrated power supply/standby battery charger

K6-TPSYS2D (TP-SYS-2D)

truPortal Access Control 2-Door Base System with Readers

- TruPortal Base System bundled with 2 readers and 5 credentials

K6-TPSYS2D2R (TP-SYS-2D2R)

truPortal Access Control 2-Door Add-on Kit

- TruPortal 2-Door Interface Module installed in UL listed enclosure with 4 AMP power supply

K6-TPAD2D (TP-ADD-2D)

truPortal Access Control 2-Door Add-On Kit with Readers

- TruPortal 2-Door Interface Module install in UL listed enclosure with 4 Amp power supply and includes 2 readers

K6-TPAD2D2R (TP-ADD-2D2R)

Keri Systems "Doors.Net" TCP/IP- based Access Control (NXT)

KF-NXT4D

- Ethernet based, 4-door controller with direct Cat5/6 connection

KF-NXT2D

- Ethernet based, 2-door controller with direct Cat5/6 connection

KF-NXT4X4

- RS485-based, remote expansion board with 4 inputs and 4 relay outputs

KF-NXT3R

- Proprietary, 4-wire, RS-485 mullion, prox reader with full supervision

KF-NXT5R

- Proprietary, 4-wire, RS-485 wall switch, prox reader with full supervision

KF-NXT1R

- Proprietary, 4-wire, RS-485 Euro-mount prox reader with full supervision

Keri's Traditional, Hardwired, Access Control

KF-DOOR32

- Doors.net no cost Software used with PXL and Entraguard. Manage up to 256 doors & sites

KF-PXL500

- Access Controllers. A perennial favorite, hardwire access controller

KF-SB593

- Second Door, add-on module for the PXL-500 containing extra I/O

Keyscan Access Control Units

- Provides 256 time zones, 512 time schedules, 511 group levels/64 holidays & 6000 transaction buffer
- Mix & match Keyscan's units to optimize system design & improved system installation (CA250 also available)

CQ-CA4500 (CA4500)

CQ-CA8500 (CA8500)

Keyscan Elevator Control Units

- 1 or 2 cab elevator controllers can be mixed & matched with any of Keyscan's controllers to create a system with an unlimited # of doors
- Provides 256 time zones, 512 time schedules, 511 group levels/64 holidays & 6000 transaction buffer
- Communication connectivity may be established with LAN/WAN or wireless LAN among other options

CQ-EC1500 (EC1500)

CQ-EC2500 (EC2500)

Door Panels & Accessories

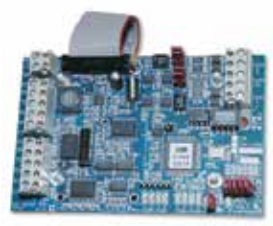

Keyscan Communication Interlink Module

- CIM utilizes a Controller Area Network (CAN) Bus infrastructure to establish a communication network among multiple ACUs
- CIM combines the robust CAN Bus protocol with a hardware interface that is superior to the standard commercial-grade CAN bus
- CIM also includes an impressive host of new features including ground loop protection, enhanced device-based diagnostic capabilities, improved speed and unprecedented reliability
- CIM delivers impressive global communication capabilities that meet the demands of the most sophisticated access control implementations

CQ-CIM (CIM)

Keyscan Communication Equipment

- NETCOM2P is a modular TCP/IP converter for direct installation on PC109X ACU/ECU boards, CB-485 & CIM communication boards
- NETCOM2 allows connection to all versions of ACU/ECU boards and legacy communication boards
- (CB-485, CPB-10-2 & CPB-10)
- Encrypted versions also available (NETCOM6 & NETCOM6P)

CQ-NETCOM2 (NETCOM2)

CQ-NETCOM2P (NETCOM2P)

Keyscan Single Door PoE Equipped Access Control Unit

- Equipped w/PoE capable TCP/IP Ethernet module which reduces install time, lengthy wiring & power requirements
- Supports 1 door (in & out reader capability), equipped with 1 door relay & 1 auxiliary relay (wet/dry)

CQ-CA150 (CA150)

4-Portal Access Controller

- Controls up to 4 doors/gates
- Networkable up to 8 controllers/256 doors or gates
- Compatible with Linear's LN-AE1000P and LN-AE2000P controllers. Accepts 26-bit, 30-bit, or 31-bit weigand devices.
- Accepts 6 addressable remote devices
- Programmable using dedicated PC or browser software

LN-ACP00950 (ACP00950)

eMerge "P-Series" Access Control Blade

- Up to 7 application modules can be mounted within a Node
- Adds additional doors to existing Node
- Two reader inputs, 4 inputs, 4 outputs

LN-EMERGEACM (0-580100-L)

YOUR BUSINESS DESERVES MORE

More Support

Sample System Design for Small Educational Facilities

This turnkey access control system is great for any single-entry educational facility, including daycare sites, pre-schools, and more. Able to expand easily up to 4-doors, and manageable from any networked PC or mobile device with internet access.

Setup and management is easy as child's play with the award-winning Linear eMerge Essential, and one proximity reader, plus a 25-pack of proximity key-ring access fobs. Features include:

- Superior security and ease of use
- Know who's entered and exited and when
- Create schedules for daytime (doors uncontrolled) periods
- Ability to lock down or unlock doors in emergency from any computer browser or mobile device with internet access

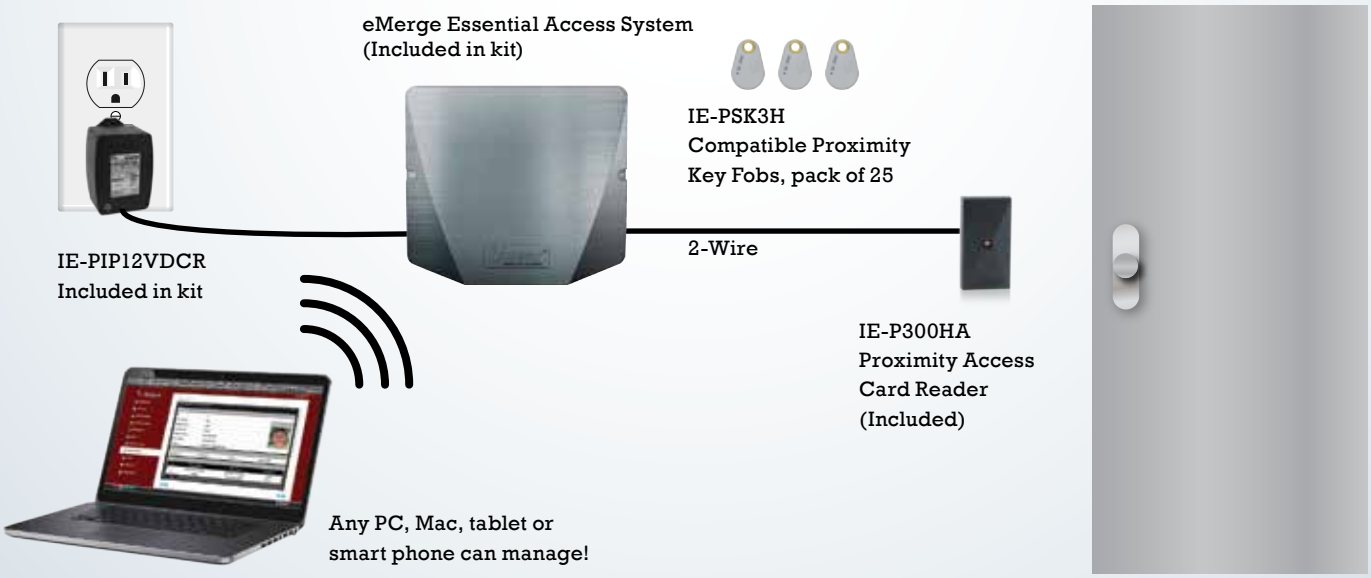

Contact our Systems Sales & Support Team at **1-800-234-7971**
to customize your system and provide complete systems integration support.

Shopping List

- ☐ **IE-ES1CB**
  eMerge Essential 1-Door Access System Bundle with 1 reader
- ☐ **IE-PSK3H**
  HID-Compatible Proximity Key Fob, pack of 25
- ☐ **4-Conductor Access Cable**
  Choose from Riser or Plenum style to match requirement

Linear®
Building On Innovation.

YOUR BUSINESS DESERVES MORE

More Support

Sample System Design for Medium to Large Educational Facilities

This turnkey access control system is great for any multiple-entry educational facility, including single-buildings with multiple entry doors, and multi-building campuses up to a maximum of 4 access doors. Able to accommodate up to 8 readers, and manageable from any networked PC or mobile device with internet access. Setup and management is easy as child's play with the award-winning Linear eMerge Essential Plus, and four proximity readers, plus a 100-pack of proximity key-ring access fobs. Features include:

- Superior security and ease of use
- Know who's entered and exited and when
- Create schedules for daytime (doors uncontrolled) periods
- Ability to lock down or unlock doors in emergency from any computer browser or mobile device with internet access

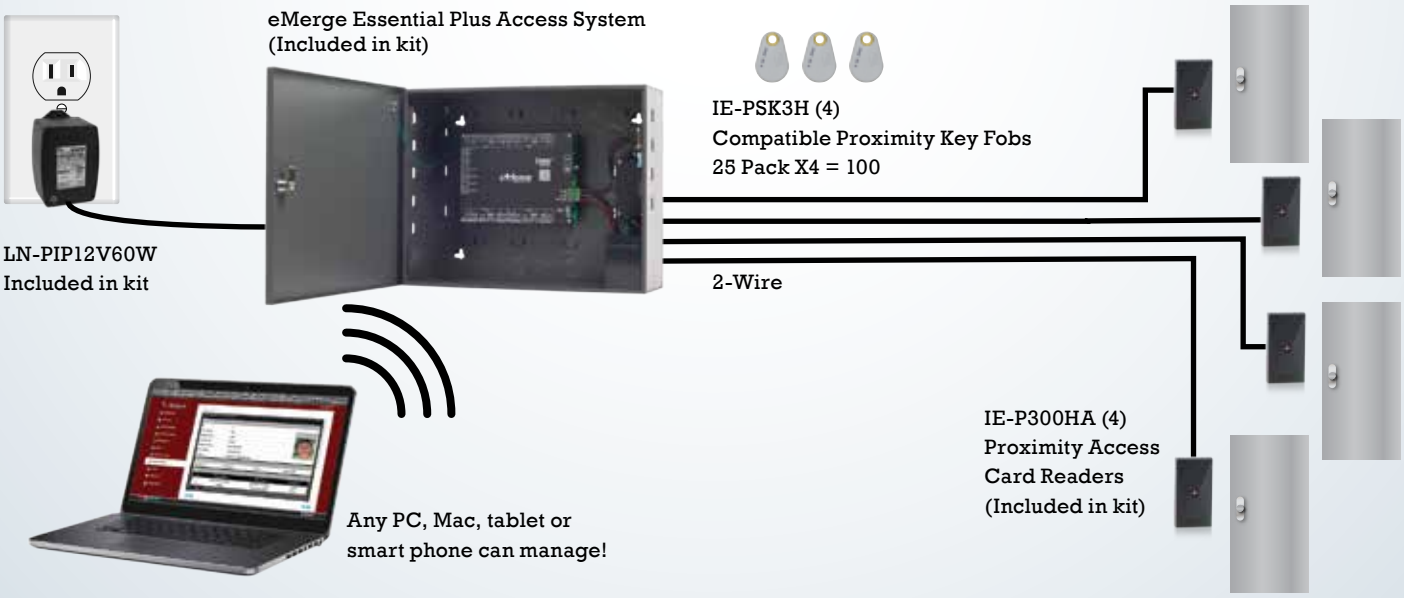

Contact our Systems Sales & Support Team at **1-800-234-7971**
to customize your system and provide complete systems integration support.

Shopping List

- ☐ **IE-ES4MB**
  eMerge Essential 4-Door Access System Bundle with 4 readers
- ☐ **IE-PSK3H (4)**
  HID-Compatible Proximity Key Fob, pack of 25
- ☐ **4-Conductor Access Cable**
  Choose from Riser or Plenum style to match requirement

Linear®
Building On Innovation.

Linear®
Building On Innovation.

eMerge License-To -Go™ 1- Door Add

- Unique and easy card for obtaining 1-door add-on license key

LN-ES1DL (ES-1DL)

eMerge License-To-Go™ 1-Door Add & Reader Bundle

- Unique and easy card for obtaining 1-door add-on license key
- Includes 1, P300HAS, HID, AWID Compatible Proximity Reader, Mullion Mount

LN-ES1DLB (ES-1DLB)

eMerge PoE (Power over Ethernet) Module

- Allows both data and power in one connection
- Provides alternate power supply

LN-E3POE (ES-POE)

eMerge Essential Plus

- 1-4 door system, 100% solid state design for extended service life
- Reliable, embedded Linux operating system
- Browser-based network appliance
- Manageable on any browser or any operating system
- Ultra-fast and easy-to-use setup wizard, Modular design provides future scalability.
- Ships with steel enclosure, power supply and battery back-up

LN-ES1MB (ES-1MB)

- Emerge essential plus, 1-door system bundle
- 1 each, P-300HAS reader (included)

LN-ES4MB (ES-4MB)

- Emerge essentail plus 4-door system bundle
- 4 each, P-300HAS readers (included)

eMerge Power Supply

- 12VDC, 60W, UL Approved

LN-PIP12V60W (0-299117RU)

eMerge Battery

- 12 Volt battery, 7 Amp hour

LN-B12VDC7A (B-12VDC7A)

eMerge License-To-Go™

- Unique and easy card for obtaining add-on license keys

LN-ESU36 (ES-U36)

- Essential to Elite-36 upgrade

LN-ESDWVL (ES-DWVL)

- Essential Digital Watchdog 4CH video

LN-ELU64 (EL-U64)

- Elite-64 upgrade license

LN-EL2DLB (EL-2DLB)

- Elite-36 2-door add with 2 reader bundle

eMerge Elite & eMerge Elite with Reader Bundles

- 1-36 door system, 100% solid state design for extended service life
- Reliable, embedded Linux operating system, browser-based network appliance
- Manageable on any browser or any operating system
- Ultra-fast and easy-to-use setup wizard. Modular design provides future scalability.
- Bundled Models Include: P-300HAS, HID, AWID Compatible Proximity Reader, Mullion Mount

LN-EL364C (EL36-4C)

- Elite-36, 4-door system, compact cabinet

LN-EL364CB (EL36-4CB)

- Elite-36, 4-door, compact cabinet, with 4 reader bundle

LN-EL364M (EL36-4M)

- Elite-36, 4-door system, standard cabinet

eMerge OneBox™ Bundles

- 1-4 door systems, 100% solid state design for extended service life
- Browser-based network appliance, manageable on any browser or any operating system
- Integrated w/ Digital Watchdog DVR

LN-ES1D45G (ES1-D45G)

- Essential 1-door, 4-channel DVR w/500GB hard drive

LN-ES4D41T (ES4-D41T)

- Essential 4-door, 4-channel DVR w/1TB hard drive

LN-ES4D82T (ES4-D82T)

- Essential 4-door, 8-channel DVR w/2TB hard drive

LN-ES1BD45G (ES1BD45G)

- Essential 1-door, 4-channel DVR -500GB, 1 reader

LN-ES4BD41T (ES4BD41T)

- Essential 4-door, 4-channel DVR -1TB, 4 readers

LN-ES4BD82T (ES4BD82T)

- Essential 4-door, 8-channel DVR-2TB, 4 readers

eMerge Elevator Expansion Nodes

LN-EV0C (EV-0C)

- Elevator expansion node, compact cabinet

LN-EV0M (EV-0M)

- Elevator expansion node, standard cabinet

LN-ACMEV (ACMEV)

- Elevator ACM expansion module

eMerge Elite Door Expansion Nodes & Bundles

LN-EXN2C (EXN-2C)

- 2-door EX node with compact cabinet

LN-EXN4C (EXN-4C)

- 4-door EX node with compact cabinet

LN-EXN2CB (EXN-2CB)

- 2-door EX node with compact cabinet and 2 reader bundle

Door Panels & Accessories

Mircom Two Door Card Access System Kit

- Two door kit comes complete with (1) two-door controller, (2) proximity mullion mount card readers, and configuration software and USB cable
- Standalone system or integrates with the TX3 telephone entry system
- Consolidated database for TX3 telephone and card access systems enables user to view all events through common software
- Supports elevator control
- Expandable system supports up to 126 card readers
- Long range vehicle access using two and four button transmitters

MI-TX3CX2K (TX3-CX-2K)

Access Control Appliance

- Manage up to 1,000 doors, devices, and elevator floors through door controls
- Wireless connection to door controllers up to 1 mile
- Remote configuration and administration
- Unlimited card holders, schedules, and events
- Mobile application with IP camera integration and door control
- Nightly auto backup to the cloud for 180 days
- Email and text notifications
- All software included at no cost
- Also connects to Networked and USB door controllers

JW-PM01ACP

Single Door Controller (Wireless)

- Connects to access controller (required)
- Wireless connection up to 1 mile between door controllers
- Wireless communication is built on a mesh, every door acts as a repeater
- Built in power supply for door hardware
- Works with most wiegand reader formats, no proprietary readers
- Ideal for installation at or near the door
- Also available in Network (JW-PM07SDCE) and USB (JW-PM07SDCU)

JW-PM07SDCW

Eight Door Controller (Wireless)

- Wireless connection up to 1 mile between door controllers
- Wireless communication is built on a mesh, every door acts as a repeater
- Facilitates door and elevator control
- Works with most wiegand reader formats, no proprietary readers
- Ideal for centralized or hardwire installations
- Also available in Network (JW-PM07EDCE) and USB (JW-PM07EDCU)

JW-PM07EDCW

Access Server

- Access Control server for EL W

F7-7212679 (ACS)

Liberty Access Control

- Liberty is a low cost and simple to install IP Access Control System. There are no expensive control panels in the system. The Starter Kit has software for 12 doors and hardware for two. Just add inexpensive bridges to expand.

VT-5080LBTY (50-80-LBTY)

Keyscan System VII Software

- Integrates with CCTV (K-TV), Photobadging (K-BADGE), Visitor Management (K-VIS), DSC (K-DSC), WEB based interface (K-WEB) & Active mapping which is included with System VII (K-CM)

CQ-SYSTEMVII (SYSTEM VII)

Keyscan Centrally Managed Access Control

- Keyscan's Centrally Managed Access Control allows Integrators/Central Stations to offer access control as a web service (SaaS) with the Keyscan K-WEB software module
- Contact Keyscan for host configuration and centrally managed requirements

CQ-KRN (K-RN)

Keyscan Aurora Access Control Management Software

- Includes System VII features plus it delivers a new experience, even more options & more control
- DVD now includes photo badging, visitor mgt, output module & Aurora Web (web license required)
- Designed for new Keyscan hardware & intended for new installations
- Supports 45,000 cardholders (with expansion to 90,000)

CQ-AURORA (AURORA)

Honeywell

WIN-PAK® Access Control Software

Honeywell's WIN-PAK® software suite provides a range of solutions from access control only to fully integrated security solutions.

- WIN-PAK XE 4.0 (Express Edition) is the baseline software package for access control only. Manage NetAXS and NS2/NS2P controllers from a single workstation. WIN-PAK XE is ideal for single workstation systems that require access only functionality.
- WIN-PAK SE 4.0 (Standard Edition) is the software package for access control and standard video integration. The add-on VISTA® intrusion module can further enhance the integration solution. WIN-PAK SE 3.0 is ideal for small to medium integrated security applications and is available in 1 or 5 workstation versions.
- WIN-PAK PE 4.0 (Professional Edition) combines all the features of XE and SE plus an unrestricted number of client workstations; VISTA intrusion and advanced video integration; support for multiple department/site applications; multiple communication servers for large applications. All inclusive, no additional upgrades needed.

WIN-PAK Features:

- 64-bit and 32-bit supported operating systems: Windows® 7 Professional, Windows 7 Ultimate, Windows Server 2008 R2, Windows Server 2012 R2, Windows 8.1
- Intrusion Integration: Add WIN-PAK to an existing VISTA-128BPT, VISTA-128BPE, VISTA-128FBP, VISTA-250BPT, VISTA-250BPE, VISTA-250FBP installation to disarm partitions from a single valid card read or arm partitions by presenting the card three times to the reader
- Video Integration: Video Rapid Eye Multi-Media Series, Fusion Series, MAXPRO® NVR Series and HRDP Series DVR systems.
- Access Integration: WIN-PAK natively supports current and legacy panels: NetAXS-123, NetAXS-4, PRO2200, PRO3200, NS2, NS2P, N-1000 and PW-2000 series controllers.

WIN-PAK Software:

NC-WPS4
- WIN-PAK SE 4.0, single user

NC-WPX4
- WIN-PAK XE 4.0, single user, access only, supports NetAXS, NS2 and NS2P panels only

NC-WPS4V
- WIN-PAK SE 4.0, single user with VISTA Integration

NC-WPS4U5
- WIN-PAK SE 4.0, five user

NC-WPS4U5V
- WIN-PAK SE 4.0, five user with VISTA Integration

NC-WPP4
- WIN-PAK PE 4.0 with Advanced Video, Intrusion, unrestricted users and 50 accounts

PRO3200 Access Control Hardware:

NC-PRO32R2
- 2-door reader board under the box:

NC-PRO32E1EN
- Intelligent Controller Kit TCP/IP Communication

NC-PRO32E1D4
- 4-door TCP/IP

NC-PRO32E1D8
- 8-door TCP/IP

NC-PRO32SKD8
- 8-door TCP/IP Kit with WIN-PAK SE 4.0 Software

YOUR BUSINESS DESERVES MORE

ASSA ABLOY

Products Designed to Work Together

K12 OPTIONS FOR EVERY BUDGET

Find a school access control solution to meet your needs.

Contact ADI today.

877.228.6739 www.adiglobal.us

ASSA ABLOY, the global leader in door opening solutions

Adams Rite hes SECURITRON

YOUR BUSINESS DESERVES MORE

Equipment or Maintenance Storage

interior opening, wood door x hollow metal frame, with existing lockset to preserve your investment

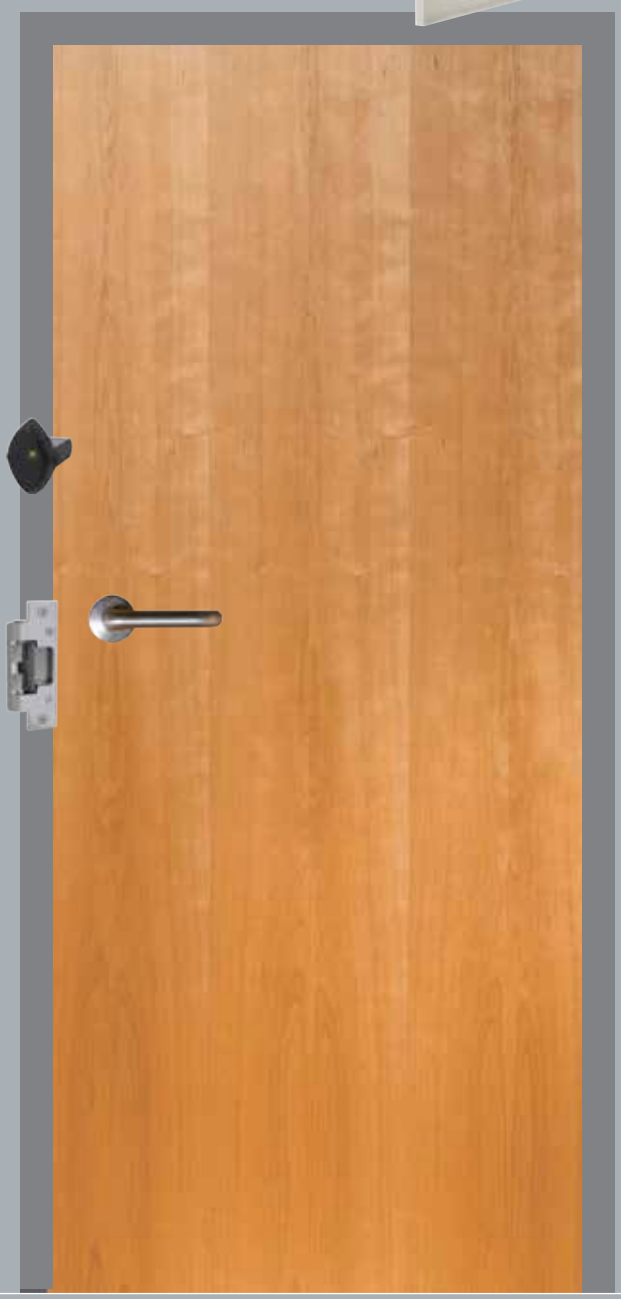

SN-AQD3
Securitron AccuPower® Switching Power Supply

Dual voltage, supervised units with battery charger.

HE-830017401
HES 8300 Integrated Electric Strike

Concealed, fire-rated electric strike with the Prox reader with HID® technology included. No cutting to the frame required.

YOUR BUSINESS DESERVES MORE

Hospital Personnel Lounge

interior opening, wood door x hollow metal frame, cylindrical or mortise lockset, fire-rated

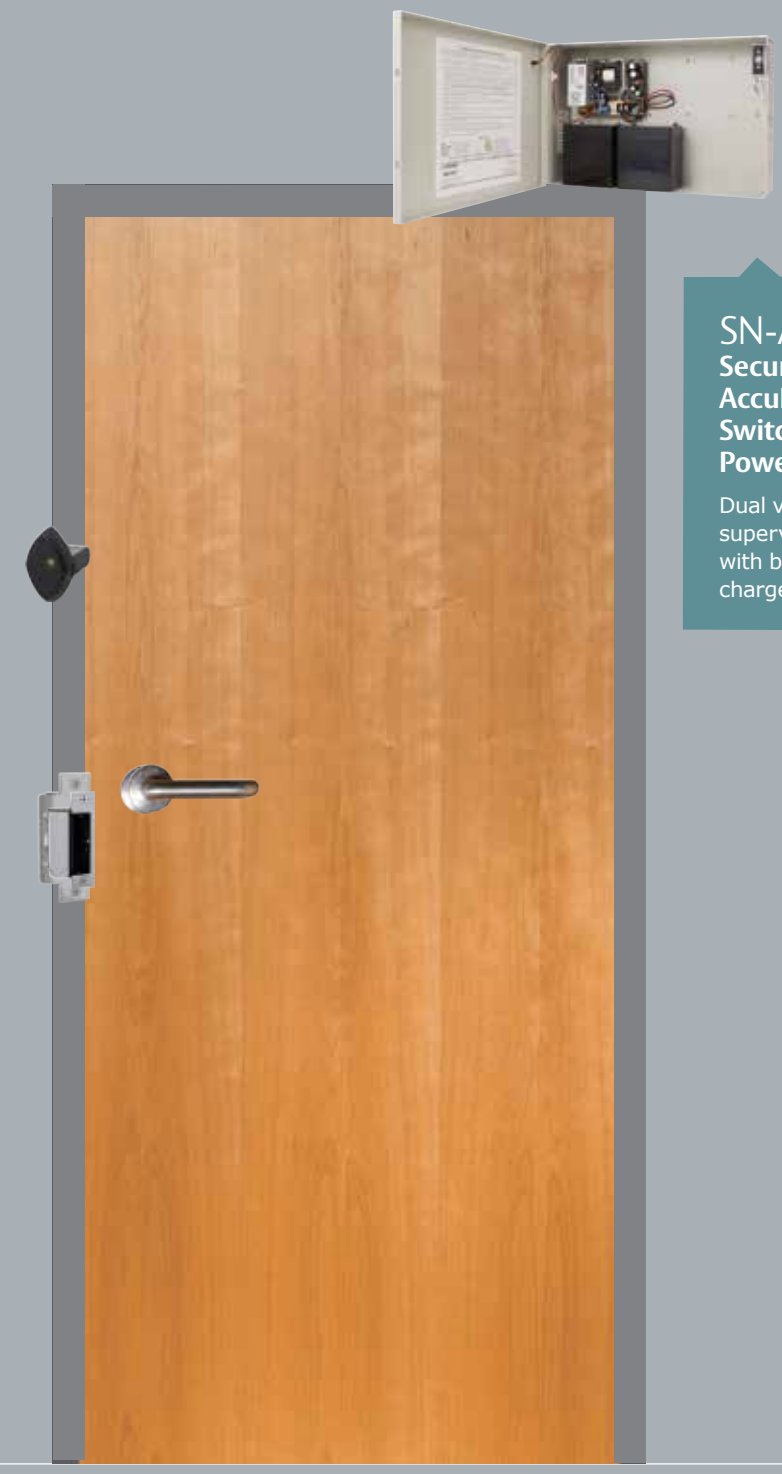

SN-AQD3
Securitron AccuPower® Switching Power Supply

Dual voltage, supervised units with battery charger.

Use with your existing credential reader
or purchase

HE-100617401
HES Integrated 1006 Electric Strike

The strongest and most versatile strike, with the Prox reader with HID® included. Use with rim exits, mortise or cylindrical locksets.

YOUR BUSINESS DESERVES MORE

Memory Care Facility

delayed egress wood door x hollow metal frame, high security, non fire-rated application

SN-IMXDA
Securitron Exit Delay

Integrated Movement Exit Delay to protect memory care facilities, hospitals, dormitories, airports, child care.

SN-BPS241
Securitron Boxed Power Supply

Linear output, single voltage power supply with battery backup.

SN-DK16
Securitron Digital Keypad or wall reader by others

Provides medium/high security control of electric locks in a one- or two-door application.

SN-DTSB3CL
Securitron Dummy Touch Sense Bar

Dummy bar with no release function.

YOUR BUSINESS DESERVES MORE

Employee Entrance

perimeter opening, aluminum and glass double doors x hollow metal frame, lockdown capable, high traffic, free egress

SN-AQD5
Securitron AccuPower Switching Power Supply

Dual voltage, supervised units with battery charger.

SN-DK37SS
Securitron Digital Keypad

for narrow stile applications units with battery charger.

HE-100610401
HES 1006 Electric Strike

Use with your existing rim exit, mortise or cylindrical lockset

YOUR BUSINESS DESERVES MORE

Clinic Main Entrance

perimeter opening, aluminum and glass double doors x hollow metal frame, lockdown capable, high traffic, free egress

SN-DT7
Prime Time Digital Timer

Timed unlocked, locked, or access-control-only states to turnelectrice locks on and off at programmed times.

SN-AQD5
Securitron AccuPower Switching Power Supply

Dual voltage, supervised units with battery charger.

R8-219031120
Adams Rite Dual Force 2190 Interconnected Deadbolt/Deadlatch

RCI®
RUTHERFORD CONTROLS
A DORMA Group Company

Access Controls Solutions Designed to Protect Students, Staff and Property.

Access control systems are designed to enable or prevent people from entering or exiting a location. From primary school to the largest college or university campus, prevention and deterrence are the keys to protecting students, staff and authorized visitors. With 90 years of experience in the electric locking hardware industry, RCI offers the best in innovative access control solutions. Our wide range of easy-to-use products offer a solution to fit every need.

Be Proactive

Develop a long-term security plan for your school. Contact ADI today! **877-228-6739**

Student and Staff Safety

RCI offers innovative solutions to help keep our schools safe. Our complete line of access control products provide the ultimate in security.

- **Early Warning Electromagnetic Locks** sense when an intruder is attempting to gain access through a locked door and provide notification of attempted forced entry before door is compromised giving staff enough time to react by implementing a lockdown.
- **Delayed Egress Electromagnetic Locks** have a built-in sensor that detects pressure applied to an outward swinging door. Built-in sounder, voice and CCTV monitoring combinations make this ideal for keeping school staff and students safe.
- **Electric Strikes** are an electric door locking device that unlocks the doorwhen electrical power is applied to it. RCI offers models that are completely surface-mounted and designs to accommodate hollow metal, aluminum and wood door frames.
- **Exit Devices** feature a patented interlocking strike and latch technology which makes it virtually impossible to pry or force open.

Electromagnetic Locks



RU-EW83108

Electric Strikes
RU-F
(0162 Series)

Exit Devices

RU-1300 Series

Unauthorized Access

RCI makes it easy to create secure facilities that keep unauthorized individuals from gaining entry into the school or prohibited areas within the building.

- **Keypads** are an access control device which are electronically wired directly to a lock or access control system. The numerical keypad provides nearly unlimited options for customized access codes to allow the access and egress to authorized individuals.
- **Proximity Readers** are an access control device which are electronically wired directly to a lock or access control system. Pre-programmed devices such as cards or fobs provide the flexibility of allowing access and egress to authorized individuals.
- **Rocker Switches** are ideal for desk mount applications. They can be surface-mounted under a desk or counter for concealment.

Keypads

RU-9212I Series

Rocker Switch

RU-909 Series

Proximity Readers

RU-9321 Series

High Value Assets Protection

RCI offers access control systems designed specifically to protect high valueassets such as AV equipment, records and other physical assets.

- **Cabinet Locks** are an ideal stand-alone solution. They provide superior protection for high value assets.
- **Low Powered Prox Access Control System** is a low powered batteryoperated access control with proximity reader. It is a complete system in one easy-to-install kit. The kit comes complete with a proximity reader, controller and lock. The compatibility makes it an ideal solution for adding access control to a remote door or cabinet that's not tied into the existing hardwired system.

Cabinet Locks

RU-3590 Series

Access Control Systems

Single Door System
LPP
(Low Powered
Prox Series)

DELL OEM Powered

ADI offers a large portfolio of ip security solutions powered by Dell

Ask your ADI sales representative about special 6-month interest free financing options on all Dell orders over $2,500

ADI Is Your One Stop for IP Shopping:

- Cameras
- VMS
- Servers
- Workstations
- Storage
- Switches
- Monitors
- Surge Protection
- UPS
- Cable Management
- Plates & Jacks
- Wire & Cable

Adams Rite ASSA ABLOY

IMAGE NOT SHOWN

Steel Hawk 4300 Electrified Deadlatch

- The easiest way to electrify narrow stile aluminum and glass doors
- Non-handed with patented two-way 'winged' technology
- Retrofits to Adams Rite MS deadbolt prep
- Simple, no-cut installation
- Rated for continuous duty

R8-4300ELATCH (4300 eLatch)

Adams Rite ASSA ABLOY

7400 Series Ultraline Electric Strikes

- Adjustable keeper releases with 35+ lbs. of pre-load
- Field selectable Fail-safe/Fail-secure 12/16/24VAC/VDC
- ANSI/BHMA Grade 1 (WHI listed)
- Compact with 1-1/16" overall depth
- Variety of faceplate sizes and finishes

R8-7400628 (7400)

ALARM CONTROLS ASSA ABLOY

Magnetic Lock Bracket for In-Swinging Doors

- Three piece Z bracket for all 1200 series single magnetic locks

AC-AM6370 (AM6370)

ALARM CONTROLS ASSA ABLOY



600 lSingle Magnetic Lock

- 600 pound minimum holding force
- 12 or 24VDC, low current draw
- UL 10C rated for fire doors
- Lifetime warranty

AC-600S (600S)

ALARM CONTROLS ASSA ABLOY



1200 lSingle Magnetic Lock

- Up to 1500 pounds of holding force
- Magnet Size: 10-1/2" L x 2-7/8" W x 1-1/2" W
- Operates on 12 or 24VDC, jumper selectable
- 400mA @ 12VDC, 200mA @ 24VDC

AC-1200S (1200S)

ALARM CONTROLS ASSA ABLOY

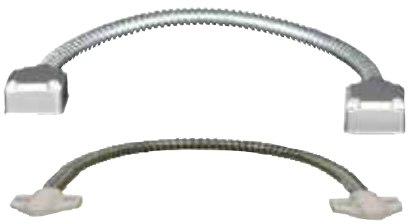

Armoured Door Loops

- AC-DL2 .375 dia. stainless steel jacket with die cast metal end caps
- All door loops are 18" long
- AC-DL1 .250 dia. stainless steel jacket with brown and white changeable end caps

AC-DL1 (DL-1)

AC-DL2 (DL-2)

ALARM CONTROLS
ASSA ABLOY

600 lDouble Magnetic Lock

- Up to 700 pounds of holding force per lock
- 12 or 24VDC operation, jumper selectable
- Clear anodized finish standard, dark bronze finish available
- Lifetime warranty

AC-600D (600D)

600 lDouble Magnetic Lock D.S./B.S.

- 750 lb. holding force per lock
- Door status and bond sensor
- Bi-colored status LED, S.P.D.T. 3A relay
- Lifetime warranty

AC-600DLB (600DLB)

600 lSingle Magnetic Lock with Bond Sensor

- Up to 750 lbs. of holding force
- Bond sensor and door status sensor
- Clear anodized finish, dark bronze finish available
- Lifetime warranty

AC-600LB (600LB)

600 lWeather-Proof Magnetic Lock

- Ideal for sliding and swinging gates
- 600 lb. minimum holding force
- 12" color coded leads in armored cable with metal end cap
- Lifetime warranty

AC-600WP (600WP)

1200 lDouble Magnetic Lock

- Up to 1500 lbs. of holding force per lock
- Bi-colored status LED, bond sensor and door status sensor
- S.P.D.T. 3A relay contacts
- Lifetime warranty

AC-1200D (1200D)

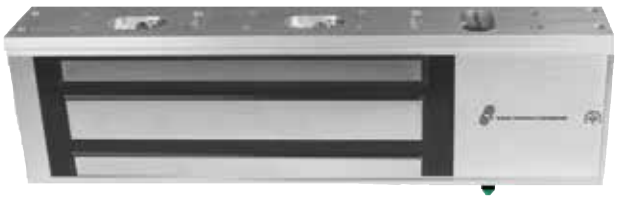

1200 lSingle Magnetic Lock D.S./B.S.

- Up to 1500 lbs. of holding force per lock
- Bi-colored status LED, S.P.D.T. relay
- Bond sensor and door status sensor
- Lifetime warranty

AC-1200LB (1200LB)

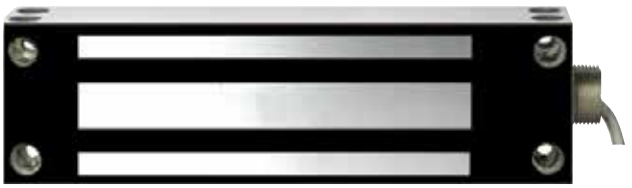

1200 lWeather-Proof Magnetic Lock

- Up to 1500 lbs. of holding force
- Completely sealed in a stainless steel case
- Fitted with 1/2" I.D. and 3/4" O.D. conduit fittings
- Ideal for sliding and swinging gates

AC-1200WP (1200WP)

Camden DOOR CONTROLS

Heavy Duty Power Transfer Cables

- The best performance and price
- 1/4" I.D. stainless steel armored conduit
- Stainless steel cable and end caps
- 3 year warranty

CM-PTS14 (CM-PTS14)

- 12" length, plastic end caps

GET IT NOW!

CM-PTSS7

- 7" length

CM-PTSS12

- 12" length

CM-PTSS18 (PTSS18)

- 18" length, ss end caps.

DynaLock™ For Life™

Electric Strike

- Field selectable input 12/24AC/DC
- Field selectable fail-safe/fail-secure lock mode
- Non-handed, centerline latch entry
- Horizontal adjustability - up to 1/4"
- UL 1034 burglary resistant

DY-1614SUS32 (1614S-US32D)

DynaLock™ For Life™

Heavy-Duty Fire-Rated Strikes

- 12VAC/VDC or 24VAC/VDC models
- UL 10C 1-1/2 Hr. fire-rated
- UL 1034 burglary resistant
- 1,500 lbs. static strength, 250,000 cycles
- US32D cast stainless steel housing

DY-181912 (1819-12)

DY-181924 (1819-24)

DynaLock™ For Life™

Fire-Rated Electric Strike

- 12VAC/DC or 24VAC/DC models
- UL 10B 1-1/2 hour fire-rated
- UL 1034 burglary resistant
- Accommodates up to 3/4" non-Pullman latch
- For cylindrical, centerline mortise, narrowline aluminum locksets, or mortise exit devices

DY-171412VDC (1714-12)

DY-171424VAC (1714-24)

DynaLock™ For Life™

Delay Egress System Mag Lock

- Auto Voltage Sensing 12-24 VAC/VDC Input
- 1500 Lbs. holding force
- Code-compliant self-contained delayed egress
- Field-customizable sequencing parameters
- Works with extisting latch hardware
- DynaLife® lifetime warranty

DY-3101C (3101C-US28)

DynaLock™ For Life™

Free Egress PIR Mag Lock

- Dual voltage 12/24AC/DC
- FasTrak adjustable mounting
- Built-in PIR request-to-exit sensor
- Independent access & egress timers
- DynaLife® lifetime warranty

DY-3006 (3006-US28)

DynaLock™ For Life™

"Classic" Low Profile Mag Lock

- Dual voltage 12/24DC
- Low 2" profile
- Optional door and lock status sensors, timer & Bi-LED
- 1200 lbs. holding force
- DynaLife® lifetime warranty

DY-226810 (2268-10-US28)

DynaLock™ For Life™

MEA approved UL

1200 lbs. Holding Force Mag Lock

- Dual voltage 12/24AC/DC
- Adjustable mounting
- Optional door and lock status sensors, timer & Bi-LED
- Optional TJ20 inswing mounting kit
- DynaLife® lifetime warranty

DY-2011 (2011-US28)

DynaLock™ For Life™

MEA approved UL

650 lbs. Holding Force Mag Lock

- Dual voltage 12/24AC/DC
- Compact "Mini Mag" design
- Optional door and lock status sensors, Bi-LED
- DynaLife® lifetime warranty

DY-2511 (2511-US28)

DynaLock™ For Life™

MEA approved UL

1500 lbs. Holding Force Mag Lock

- Dual voltage 12/24AC/DC
- FasTrak adjustable mounting
- Optional door and lock status sensors, timer & Bi-LED
- Optional TJ30 inswing mounting kit
- DynaLife® lifetime warranty

DY-3000RHR (3000-US28)

hes ASSA ABLOY

HES 1006 Series Faceplate Options

- Faceplates options available for most locksets
- Popular satin stainless steel finish
- "J" option faceplate for use with cylindrical locksets
- ANSI/BHMA A156.31 Grade 1

HE-100620001 (J-630)

GET IT NOW!

hes ASSA ABLOY

HES 1006 Series Faceplate Options

- Faceplates options available for most locksets
- ANSI/BHMA A156.31 Grade 1
- "K" option faceplate for use with mortise locksets with a deadlatch above the latchbolt - (4-7/8" x 1-1/4")

HE-100620011 (K-630)

GET IT NOW!

HES 1006 Series Faceplate Options

- Faceplates options available for most locksets
- ANSI/BHMA A156.31 Grade 1
- "KM" option faceplate for use with mortise locksets with a deadlatch below the latchbolt - (4-7/8" x 1-1/4")

HE-100620031 (KM-630)

HES 5000/5200 Series Faceplates

- For use with HES 5000 & 5200 series electric strikes
- "501" Option faceplate for use with cylindrical locksets in ANSI metal jambs - (4-7/8" x 1-1/4" - sq. corners & flat faceplate). Popular finishes available.

HE-500020001 (501-630)

HES 5000/5200 Series Faceplates

- For use with HES 5000 & 5200 series electric strikes
- Popular finishes available
- "501A" Option faceplate for use with cylindrical locksets in aluminum frames - universal mounting tabs included

HE-500020011 (501A-630)

HES 5000/5200 Series Faceplates

- For use with HES 5000 & 5200 series electric strikes
- "503" option faceplate for use with cylindrical locksets - universal mounting tabs included (6-7/8" x 1-1/4" - radius corners & flat faceplate). Popular finishes available.

HE-500020031 (503-630)

8000 Series Faceplate

- Used with HES 8000 series electric strikes
- Available in several finish colors
- Grade 1 for use with: Cylindrical locksets in ANSI metal frames with latchbolts up to 5/8" throw - 4-7/8" x 1-1/4"

HE-800020001 (801-630)

HES 1006 Electric Strike

- Windstorm resistance rated, ANSI/BHMA Grade 1
- UL 10C fire-rated
- Dual voltage 12 or 24VDC continuous duty
- Numerous faceplate options available

HE-100610401 (1006-631)

HES 1006CLB Complete Pac Electric Strike

- The most versatile electric strike available
- 1006 series electric comb. w/"J", "KD" & "KM" opt. faceplate
- Kit allows for complete installation - no addt'l parts to buy
- Our most popular faceplate options at a value price

HE-100630443 (1006CLB-630)

HES 5000 Electric Strike

- Compact high performance for cylindrical lock sets
- ANSI/BHMA Grade 1, UL 1034 burglary-resistant rated
- Field selectable fail secure/fail safe, 12 or 24VAC/VDC
- 1-1/16" strike body depth - shown with 501 faceplate

HE-500010401 (5000-630)

HES 5200 Electric Strike

- Horizontal adjustability, dual voltage 12 or 24VAC/VDC
- ANSI/BHMA Grade 1, UL 1034 burglary-resistant rated
- Field selectable fail secure/fail safe for cylindrical lock sets
- Shown with 501 faceplate - sold separately

HE-520010401 (5200-630)

HES 5000C Complete Pac

- Allows for complete installation-no additional parts to buy
- Compact 1-1/16" strike body depth
- Field selectable fail safe/fail secure
- 5000 Series electric strike combined w/501, 501A option faceplate in one convenient package

HE-500030403 (5000-12/24D-501-630)

HES 5200C Complete Pac

- Grade one with horizontal adjustability
- For cylindrical locksets, includes 501 & 501A faceplates in one convenient package
- Static strength 1500 lbs. - dynamic strength 70 ft.-lbs.
- Dual voltage 12 or 24VDC/VAC

HE-520030404 (5200C-630)

HES 8000 Electric Strike

- Easy install, no cut-in for cylindrical locksets
- ANSI/BHMA Grade 1; field selectable fail safe/fail secure,dual voltage 12 or 24VAC/VDC
- Shown with 801 faceplate - sold separately

HE-800010401 (8000-630)

8000C Complete Pac

- 8000 series concealed electric strike paired with 801& 801A faceplates in one convenient package. No cut frame installation.
- For use with: Cylindrical locksets in ANSI metal frames with latchbolts up to 5/8" throw

HE-800010403 (8000C-630)

8500 Series Electric Strike

- The concealed solution for mortise locksets
- No cutting the frame
- Use with 3/4" mortise latchbolts with or without deadlatch
- Shown with 852k faceplate - sold separately

HE-850010401 (8500-12/24D-630)

HES 4500C Complete Pac Electric Strike

- Low profile for mortise or cylindrical locksets
- ANSI/BHMA Grade 1, UL 10C fire-rated
- Faceplates included for cylindrical and mortise locksets
- Low profile design, 1-3/8" strike body depth

HE-450030601 (4500C-630)

HES 9400 Electric Strike

- Completely surface mounted, 1/2" thick
- ANSI/BHMA Grade 1, UL 1034 burglary-resistant rated
- Use with 1/2" rim exit device
- Field selectable fail safe/fail secure

HE-940010401 (9400-630)

HES 9500 Electric Strike

- UL10C fire-rated, 3 hour, UL 1034 burglary-resistant listed. ANSI/BHMA Grade 1.
- Surface mounted – no cut-in
- Dual 12 or 24VDC

HE-950010401 (9500-630)

HES 9600 Electric Strike

- ANSI Severe Windstorm listed, ANSI/BHMA Grade 1
- Field selectable fail safe/fail secure, dual voltage 12 or 24VDC. Use with 3/4" rim exit device.
- UL 1034 burglary resistant listed

HE-960010401 (9600-630)

HES Strike Latch Guard

- Installed at the edge of the door to cover the lock and electric strike
- Stainless steel
- Available in 626 finish only

HE-015060051 (150 Latch Guard)

SMART Pac III

- Reduces voltage by 25% after a fixed period of time, to provide cooler, more efficient operation of strike
- Accepts wide range of input voltage, 12-32 Volts AC or DC
- Output 12VDC or 24VDC, depending on input voltage

HE-200560406 (SMART Pac III)

K100-621 Cabinet Lock and Aperio™

- Battery-operated wireless lock communicates with existing electronic access control system
- Includes paired Wiegand communication hub
- High security, Grade 1 asset protection with audit trail
- Supports HID® 125 kHz proximity or 13.56 mHz iCLASS® contactless credentials. Uses existing ID badges.

HE-K621PB1 (K100-621PA-B1)

212LS Electronic Access Control Cylindrical Lockset

- Indoor/outdoor, weatherproof, access control lockset with keypad, 120 user codes, 1-6 digit codes
- Four AA battery powered, override key, Grade 2 latch, 2-3/4" backset "T" strike plate), clutch lever design
- Right or left handed, field changeable

IE-212LSUS3R (212LS-CUS3CR-RT)

- Right or left handed, polished brass

IE-212LS26DR (212LS-C26DCR-RT)

- Right or left handed, brushed chrome

Kwikset | HOME CONNECT

The Best Security is Smart Security

- Full integration with security, lighting and energy management control systems
- Motorized deadbolt mechanism for true remote locking and unlocking
- Up to 30 user access codes
- Remote access control and notification support
- Home automation interoperability, arm/disarm security system, control lighting, and more
- Backup keyway featuring SmartKey® re-key technology – re-key in seconds for one-key convenience
- BumpGuard™ protection- Provides superior lock-bumping and lock-picking protection

SmartCode™ 914 Deadbolt

KT-99140001 (99140-001)
- Polished Brass, Z-Wave

KT-99140002 (99140-002)
- Satin Nickel, Z-Wave

KT-99140003 (99140-003)
- Venetian Bronze, Z-Wave

Arched Style SmartCode™ 910 Deadbolt

KT-99100004 (99100-004)
- Polished Brass, Z-Wave

KT-99100005 (99100-005)
- Satin Nickel, Z-Wave

KT-99100006 (99100-006)
- Venetian Bronze, Z-Wave

GET IT NOW!

KT-99100015 (99100-015)
- Polished Brass, ZigBee HAI

KT-99100016 (99100-016)
- Satin Nickel, ZigBee HAI

KT-99100017 (99100-017)
- Venetian Bronze, ZigBee HAI

Arched Style SmartCode™ 912 lever

KT-99120005 (99120-005)
- Satin Nickel, Z-Wave

GET IT NOW!

KT-99120004 (99120-004)
- Polished Brass, Z-Wave

KT-99120006 (99120-006)
- Venetian Bronze, Z-Wave

KT-99120007 (99120-007)
- Polished Brass, ZigBee HAI

KT-99120008 (99120-008)
- Satin Nickel, ZigBee HAI

KT-99120009 (99120-009)
- Venetian Bronze, ZigBee HAI

Contemporary Style SmartCode™ 910 Deadbolt

KT-99100011 (99100-011)
- Satin Nickel, Z-Wave

KT-99100012 (99100-012)
- Satin Chrome, Z-Wave

KT-99100013 (99100-013)
- Polished Chrome, Z-Wave

KT-99100014 (99100-014)
- Venetian Bronze, Z-Wave

KT-99100018 (99100-018)
- Satin Nickel, ZigBee HAI

KT-99100019 (99100-019)
- Satin Chrome ZigBee HAI

KT-99100020 (99100-020)
- Polished Chrome, ZigBee HAI

KT-99100021 (99100-021)
- Venetian Bronze, ZigBee HAI

Surface Mounted Rim Strike Designed for Use with Pullman Latch Rim Exit Devices

- Slim adjustable design, ideal for tight-fitting installations
- Low energy ñ 0.01A Auto-Sensing 12-24VDC
- 1500lbf Static Strength & 70 Dynamic ft-lb
- Field selectable mode (fail safe & fail secure)

RU-05639 (R05639)

RU-0563LM9

- Latch monitoring

3513 Surface Mounted Electric Lock

- Surface-mounted compact electric lock, 440 lbs. (200 kg.) holding force
- Field selectable fail locked or unlocked assembly
- Field selectable dual voltage 12/24VDC operation
- Low energy consumption (184mA @ 12VDC, 90mA @ 24VDC)

RU-3513B (R3513B)

RU-3513DMB (R3513DMB)

Low Powered Prox Access Control System

RU-LPP0162UC (RLPP-0162UC)
- ProxRdr kit w/0162 Strike/cards

RU-LPPL65UUC (RLPP-L65UUC)
- ProxRdr kit w/L65 Strike/cards

RU-LPP3513UC (RLPP-3513UC)
- ProxRdr kit w/3513 CabLk/cards

RU-LPPF2UC (RLPP-F2UC)
- ProxRdr kit w/F2 Strike/cards

RU-LPP0162FB (RLPP-0162FB)
- ProxRdr kit w/0162 Strike/fobs

RU-LPPL65UFB (RLPP-L65UFB)
- ProxRdr kit w/L65 Strike/fobs

8310 MultiMag®

- Low energy consumption - up to 1500 lbs. holding force
- Adjustable keyhole mounting, field selectable voltage
- Plug-in wiring terminals with easy access wiring cavity

RU-831028

8310 MultiMag® with Door Status Sensor

- Door status sensor
- Low energy consumption - up to 1500 lbs. holding force
- Adjustable keyhole mounting, field selectable voltage
- Plug-in wiring terminals with easy access wiring cavity

RU-8310D28 (R83108)

8371 Surface MinMag® - for Single Out-Swinging Interior Doors

- Ideal for use with narrow style aluminum doors
- Extremely popular for interior traffic control
- Up to 750lb holding force (340kg)
- Field selectable voltage 12/24VDC

RU-837128 (R837128)

8371 Surface MiniMag® with Security Condition Sensor - LED

- Larger LED for better visibility
- Low energy consumption & field selectable voltage
  12/24 VDC
- Extremely popular for interior traffic control

RU-8371S8 (R83718)

DE8310 All-in-One Delayed Egress Electromagnetic Lock

- All-in-One delayed egress lock
- Built in "sensor" detects when pressure is applied to outward swinging doors - No need to replace existing door hardware
- Field selectable 15 or 30 second release delay with field selectable 0 to 3 second nuisance delay
- Provision for IBC, SBC, NFPA101, UBC, BOCA or NBC of Canada compliance Unique highly visible

RU-DE83108 (RDE83108)

0162 Surface Mounted Rim Strike

- No frame cutting required - completely surface mounted
- Works with exit devices with Pullman latch - with latch projections (1/2" to 3/4")
- Field selectable voltage input 12 or 24VDC and 12-24VAC
- Fire-rated version now available & with latch monitoring

RU-016232D (R01629)

RU-016232D (R01629)
RU-F016232D (RF01629)
RU-0162LM32D (R0162LM9)
RU-F0162LM32D (RF0162LM9)

4 Series Electric Strike

- 3/4" latch projection (pullman design not included)
- Enlarged latch cavity width allow compatibility w/ cylindrical, narrowline aluminum & centerline mortise locks & exit devices. UL Listed for 1,000 lbs. static strength.

RU-411459 (R411459)

7 Series Adjustable Electric Strike

- For use with Aluminum, Cylindrical, Centerline Mortise Locks and Exit Devices. Centerline latch entry (5/8")
- Adjust the strike pivot horizontally for precise alignment

RU-71145D9 (R71145D9)

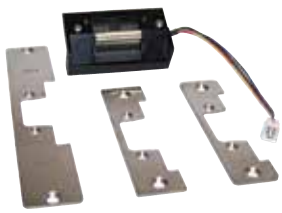

6 Series UNIVERSAL Heavy Duty Electric Strike

- Includes 3 faceplates - 04 ANSI Round corner, 14 ANSI square corner, 08 Round Corner
- Multi-voltage single solenoid, field selectable lock mode, horizontal adjustment, and plug-in wire connectors

RU-L65U9 (RL65U9)

6 Series Heavy Duty Electric Strikes

- Low Profile - 1/2" or 5/8" - perfect for narrow aluminum
- Multi-voltage single solenoid, field selectable lock mode, horizontal adjustment, plug-in wire connectors
- Optional monitor switch

RU-L65149 (RL65149)

6 Series Heavy Duty Electric Strike - Standard Profile

- Multi-voltage single solenoid, field selectable lock mode, horizontal adjustment, and plug-in wire connectors
- Optional monitor switch is available
- 3/4" latch projection

RU-S65149 (RS65149)

F2164 Fire Rated Electric Strike for Mortise Locks with Offset Latches

- Everything you need is in the box - including the faceplates
- Unique patent pending "Saw-tooth Adjustment locator" & Sliding Shim

RU-F21649 (RF21649)

9508 Heavy Duty Current Transfer Flex Loop

- Surface mounted on hinge side
- Stainless steel cable
- Accepts up to 16 conductor @ 22 ga. or 8 conductor @ 18 ga.

RU-950812S (R9508-1213S)

3590 Lock 'N' Prox Battery Powered Lock with Built-in Proximity

- Easy to install & simple to program without PC & software
- Can be fitted to sliding doors, drawer fronts, drawer backs, leaf doors, glass etc.
- Up to 25mm of reliable reading through wood material without external antenna
- 50 users per lock capability
- Minimum 30,000 latch openings per life of battery (lithium battery included)

RU-3590ACRD (R3590ACRD)

3525 Electronic Rack Handle

- Remote Lock and unlock control
- Single or multi-point locking
- Integrated sensors detect lock and handle status for monitoring and alarm functions
- Activated via any 3rd party control system (Access Control, PDU, SCADA)
- Low power, gear motor driven mechanism
- Low energy consumption (Less than 200mA at 12VDC)

RU-3525B (R3525B)

600 & 1200 lFull Feature MagLocks

- Magnetic Bond Sensing and Door Status Standard
- Simplified Armature Installation
- 12/24VDC Automatic Voltage Selection
- MagForce lifetime warranty

LC-40 (40)

LC-70 (70)

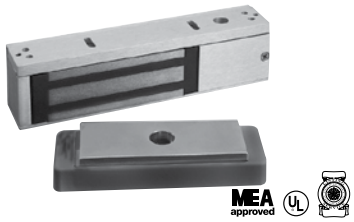

MagForce Plus Series Electromagnet Locks

- LC-M420 & M422 Mini Line with 500 lb. holding force
- LC-M450 & M452 Narrow Line w/1000 lb. holding force
- LC-M490 & M492 High Security w/1500 lb. holding force
- All with MagForce lifetime warranty

LC-M490 (M490)

LC-M492 (M492)

CO-Series Manually Programmed Lock

- Great for stand alone access control
- Quick to install & 12-button key pad
- Stores up to 500 individual PIN codes
- Standard with Schlage Everest cylinder

6S-CO100CY02 (CO-100-CY-70-KP-SPA-626-PD)

Electric Deadbolts

- Available in fail-safe or fail-secure
- Narrow design for discreet mounting
- 2 Sizes available for different door sizes and requirements

SL-SD997ADQ (SD-997-ADQ)

- Fail-secure, 12VDC

SL-SD997B (SD-997BQ)

- Mini deadbolt, fail-safe, 12VDC

SL-SD997BGB (SD-997B-GBQ)

- Fail-safe, 12/24VDC

Electric Door Strikes

- Field selectable for fail safe or fail secure
- Reversible, non-handed design fits right-handed and left-handed doors
- 24VDC Models also available

SL-SD995C (SD-995C)

- For metal doors, 12VDC

SL-SD994C (SD-994C)

- For wood doors, 12VDC

SL-SD996CNUQ (SD-996C-NUQ)

- Universal strike, 12/24 VDC

Electromagnetic Gatelocks

- 12VDC or 24VDC selectable
- Dual-threaded conduit fiting
- Weatherproof & vandal resistant
- Lifetime limited warranty

SL-E942FC130 (E-942FC-1300)

- 1300 lb. holding force

SL-E942FC1K3 (E-942FC-1K3SQ)

- 1300 lb. holding force, weldable bracket

SL-E942FC600 (E-942FC-600)

- 600 lb. holding force

SL-E942FC600SQ (E-942FC600SQ)

- 600 lb. holding force, weldable bracket

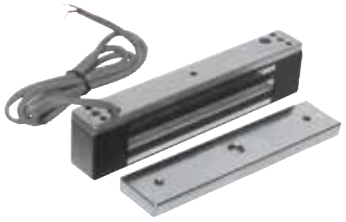

80 and 300 lElectromagnetic Locks

- 12VDC or 24VDC selectable (80Q or 300RQ only)
- Optional Z&L brackets available
- No residual magnetism
- Lifetime limited warranty

SL-E941SA80Q (E-941SA-80Q)
- 80 lb. holding force

SL-E941SA300 (E-941SA-300)
- 300 lb. holding force, indoor or outdoor

SL-E941SA3RQ (E-941SA-300RQ)
- 300 lb. holding force, reversible magnet, indoor

600 lElectromagnetic Locks

- Anodized aluminum housing (US 28)
- 12VDC or 24VDC selectable
- Optional Z&L brackets available
- Lifetime limited warranty

SL-E941SA600 (E-941SA-600)

1200 lElectromagnetic Locks

- Anodized aluminum housing (US 28)
- 12VDC or 24VDC selectable
- Optional Z&L brackets available
- Lifetime limited warranty

SL-E941SA120 (E-941SA-1200)

Specialty Electromagnetic Locks

- Built-in bond sensor and status LED
- 12VDC or 24VDC selectable
- Optional Z&L brackets available
- Limited lifetime warranty

SL-E941SA6PQ (E-941SA-600PQ)
- 600 lb. holding force

SL-E941S1KPQ (E-941SA-1K2PQ)
- 1200 lb. holding force

SL-E941SA1K2 (E-941SA-1K2PD)
- 1200 lb. holding force and timer

Double-Door Electromagnetic Locks

- Anodized aluminum housing (US 28)
- 12VDC or 24VDC selectable
- MOV surge protection
- Lifetime limited warranty

SL-E941DA1KQ (E-941DA-1K2Q)
- 1200 lb. holding force

SL-E941DA1K2 (E-941DA-1K2P)
- 1200 lb. holding force, bond sensors, LED

SL-E941DA600 (E-941DA-600Q)
- 600 lb. holding force

SL-E941DA6PQ (E-941DA-600PQ)
- 600 lb. holding force, bond sensors, LED

M32 Series Magnalock

- 600 lb. holding force - indoor/outdoor
- Automatic smart dual voltage
- Vandal resistant, 100% sealed and weatherproof
- Optional bond sensor and integrated door position switch

SN-M32F (M32F)

SN-M32 (M32)

SECURITRON
ASSA ABLOY

M62 Series Magnalock

- 1200 lb. holding force - indoor/outdoor
- Automatic smart dual voltage
- Optional bond sensor and integrated door position switch
- Vandal resistant, 100% sealed and weatherproof

SN-M62FG (M62FG)

SN-M62 (M62)

SECURITRON
ASSA ABLOY

VM 600 Series Maglock

- 600 lb. holding force
- Easy mount adjustable bracket
- Instant release (no residual magnetism)
- Optional bond sensor and door position switch available

SN-VM600 (VM600)

SECURITRON
ASSA ABLOY

Integrated Movement Exit Delay System

- 1200 lb. holding force w/automatic smart dual voltage
- 12.5" overall length will fit most any opening w/a closer
- Intelligent alarm initiate gap easily adjusts from 1/8" - 1"
- Six DIP switch selectable options for alarms & reminders

SN-IMXDA (IMXDA)

SECURITRON
ASSA ABLOY

M680 Series Maglock with Camera and PIR REX

- Integrated color surveillance camera and PIR Request to Exit motion sensor
- Bracket mounted for fast install, for out-swing doors
- Bond, door position and anti-tamper sensors standard,
  autosensing dual voltage with microprocessor technology
- 1100 lbs. holding force
- Magnacare lifetime no fault warranty

SN-M680C2X (M680)

SECURITRON
ASSA ABLOY

GL1 Gate Lock

- 2000 lbs. holding force
- Operates under preload up to 100 lbs.
- Automatic dual voltage - no field adjustment required
- Field-selectable fail secure/fail safe

SN-GL1 (GL1)

SECURITRON
ASSA ABLOY

Touch Sense Bar Door Cord

- Flexible armored stainless steel cable conduit w/ plastic end caps. Maximum flexibility for installation site on door/frame.
- Include both gray and black end caps
- Interior diameter: 1/4" [6mm], Avail. in 18" and 36" lengths

SN-TSBC (TSB-C)

SN-TSBCXL (TSB-CXL)

SECURITRON ASSA ABLOY

Z-Bracket

- Use on in-swing doors with Magnalock "F" (8.5" length)
- Provides 1.25" of lateral movement to accommodate most openings and allows for precision adjustments
- Includes an oversized dress cover. Available in 3 finish opt.

SN-ZA3262CL (ZA-32/62CL)

SECURITRON ASSA ABLOY

Concrete Wood Bracket

- Used on wood or concrete filled frames
- Provides a concealed wire chamber
- Easier than blind nuts in some cases

SN-CWB32CL (CWB32CL)

SN-CWB62CL (CWB62CL)

SECURITRON ASSA ABLOY

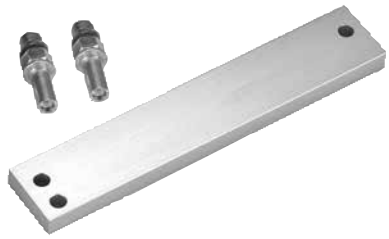

Aluminum Shim Bracket

- Used when blade stop requires the Magnalock to be lowered
- Provides blind nut for surface installation of strike
- Comes pre-drilled (lock specific) for the mounting bolts and wire

SN-ASB32CL (ASB32CL)

SN-ASB62CL (ASB62CL)

SECURITRON ASSA ABLOY

Power JumpTM ICPT Inductive Coupling Power Transfer

- Provides up to .5 Amps of safe, contactless power
- Install on hinge side, latch side or top of frame in steel, aluminum and wood doors
- Flexible mounting; can be installed on hinge side, latch side or frame in steel, aluminum and wood doors
- Continuous or intermittent duty. Operates with up to 3/16" door gap.
- Field selectable output power 12 or 24 Volts DC, up to 6 Watts

SN-ICPT (ICPT)

STANLEY Healthcare

Stanley Delayed Egress Magnetic Lock

- Up to 1200 lb. holding force w/switchable 12/24V
- Integrated door contact for door status monitoring
- Independent dry contact for remote & status, as well as fire alarm input
- Field selectable 0/1/2/3 second nuisance delay & 15/30 second egress delay

IS-17036 (17036)

STANLEY Healthcare

Stanley Standard Magnetic Lock

- Up to 1200 lb. holding force
- Integrated door contact for door status monitoring
- Independent dry contact for remote lock status
- Fully self-contained circuitry w/switchable 12/24V input voltage

IS-15556 (15556)

STANLEY Healthcare

IMAGE NOT SHOWN

Electrified Lock and Keypad

F7-7143154 (9KZ-7-DV-15-KP-626)
- Keypad Cylindrical lock

F7-7142499 (45HZ-7-DV-15-KP-626)
- Keypad mortise lock

F7-7219094 (45HW-7-DEU-15-H-626-RQE)
- Electrified mortise lock

F7-7219093 (9KW-3-7-DEU-15-D-STK-626-RQE)
- Electrified Cylindrical lock

STANLEY Healthcare

Electric Lock and Prox Reader

F7-7213688 (QEL271SPRXM-626FS4478SBFKA)
- EL Stand-alone prox lock

F7-7213689 (QEL271WPRXM-626FS4478SBFKA)
- Electric Lock and Prox Reader

STANLEY Healthcare

Gateway - Electric Lock and Reader

- Gateway kit EL wireless locks

F7-7219092 (QEW-10-ADC)

STANLEY Healthcare

Electric Strike

F7-7210921 (ES5 B -630)
- ES5 Electric Strike mortise

F7-7210918 (ES5 A -630)
- ES5 El stk mort bot d-lat 630 fin

F7-7210906 (ES4 S A-S-630)
- ES4 El Stk w 4 7/8 630 fin

F7-7210907 (ES4 S KA-S-630)
- El stk 4 7/8 keep/mon 630 fin

STANLEY Healthcare

Integrated Hardwired Lock

F7-7219088 (45HM-7-DEU-15-MS-626)
- Mortise lock Mag reader

F7-7185477 (45HM-7-DEU-15-PH-626)
- Mortise lock w/Prox reader

F7-7219089 (45HM-7-DEU-15-SC-626)
- Mortise lock i-class reader

F7-IDH9KSC (9KM-7-DDEU-15-SC-S3-626)
- Cylindrical lock w i-class

VON DUPRIN
Ingersoll Rand Security Technologies



Electric Strike

- Fail Safe/Fail Security is field selectable
- Internal 12/24VDC solenoid
- Includes 3 faceplates to cover all applications
- Designed for cylindrical lock applications

VN-5EST1002 (5EST1002)

Yale real Living™

Touchscreen & Push Button Z-Wave/Zigbee HA.1.2 Deadbolts & Levers

- Integrate with security & automation systems. KW keyway standard, SC keyway available.
- Trouble Free backup battery terminal on Key Free units
- Program up to 250 codes for remote access & control
- Voice prompted programming on touchscreen units. ANSI Grade 2 Certified.

Key Free Deadbolt

2Y-084063
- Satin nickel. Z-Wave.

2Y-084093
- Satin nickel. Zigbee HA1.2

2Y-084061
- Bronze. Z-Wave.

2Y-084091
- Bronze. Zigbee HA1.2

2Y-084062
- Brass. Z-Wave.

2Y-084092
- Brass. Zigbee HA1.2

Touchscreen Deadbolt

2Y-084018
- Satin nickel. Z-Wave.

2Y-084090
- Satin nickel. Zigbee HA1.2

2Y-084016
- Bronze. Z-Wave.

2Y-084088
- Bronze. Zigbee HA1.2

2Y-084017
- Brass. Z-wave.

2Y-084089
- Brass. Zigbee HA1.2

Push Button Deadbolt

2Y-084009
- Satin nickel. Z-Wave.

2Y-084087
- Satin nickel. Zigbee HA1.2

2Y-084007
- Bronze. Z-Wave.

2Y-084085
- Bronze. Zigbee HA1.2

2Y-084008
- Brass. Z-Wave.

2Y-084086
- Brass. Zigbee HA1.2

Touchscreen Lever

2Y-084048
- Satin nickel. Z-Wave.

2Y-084084
- Satin nickel. Zigbee HA1.2

2Y-084046
- Bronze. Z-Wave.

2Y-084082
- Bronze. Zigbee HA1.2

2Y-084047
- Brass. Z-Wave.

2Y-084083
- Brass. Zigbee HA1.2

NEW Key Free Push Button (B1L) Z-Wave Deadbolt

- Smallest residential keypad to enhance curb appeal
- Fast one button Z-Wave enrollment
- Trouble Free backup battery terminal
- Universal lock & program symbols for ease-of-use
- Enhanced interior design to reduce complexity & install time
- Program up to 100 codes for remote access and control
- ANSI Grade 2 Certified

Push Button Key Free B1L Deadbolt Z-Wave

2Y-084384
- Satin nickel. Z-Wave.

2Y-084385
- Bronze. Z-Wave.

2Y-084386
- Brass. Z-Wave.

Push Button Lever

2Y-084039
- Satin nickel. Z-Wave.

2Y-084081
- Satin nickel. Zigbee HA1.2

2Y-084037
- Bronze. Z-Wave.

2Y-084079
- Bronze. Zigbee HA1.2

2Y-084038
- Brass. Z-Wave.

2Y-084080
- Brass. Zigbee HA1.2

Wallplate for Keyswitches

- Single gang stainless steel wallplate
- D hole for switch lock
- Available in all standard paint finishes

AC-RP20 (RP-20)

Panic Button

- Normally-open red pushbutton
- Contacts rated .75A @ 125V
- Pushbutton protected with guard ring
- All standard paint finishes available

AC-RP26 (RP-26)

Remote Indicator Station

- .250 DIA. red LED mounted on single gang stainless steel wallplate
- LED operates on 12 or 24VDC
- Current draw 10 mA @ 24VDC

AC-RP28 (RP-28)

Delayed Egress Station

- Countdown buzzer and flashing lamp during timing mode
- S.P.D.T. remote alarm signal, S.P.D.T. timed contacts for unlocking door
- Operates on 12 or 24VAC/DC, 200 mA max.
- Lifetime warranty

AC-DE1 (DE-1)

Pushbutton Control Station

- Key reset mushroom button with two keys
- One N/O & one N/C contact rated 10A @ 35VDC
- Switch locks which pushed, released with key
- Switch is weather-proof to IP65 (direct water spray)
- Lifetime warranty

AC-KR1 (KR-1)

Explosion-Proof REX Stations

- Designed for hazardous locations
- NEMA type 7, Class 1, division 1 & 2, group B,C & D
- 1 N/O & 1 N/C momentary contacts, rated 5A @ 120VAC, 35VDC
- Heavy cast aluminum enclosure with 2" push-button
- AC-EXP2 latching action switch

AC-EXP1 (EXP-1)

ALARM CONTROLS ASSA ABLOY

Request to Exit Push Bar

- Four D.P.D.T. switches for positive redundant operation
- Low profile design, 34-1/2" L x 2-1/2" W
- Supplied with armoured door loop
- Clear anodized satin aluminum finish, dark bronze finish available
- Lifetime warranty

AC-REB1 (REB-1)

ALARM CONTROLS ASSA ABLOY

SREX-100 Active Focused IR REX Sensor

- Narrow activation zone is limited to the door handle
- Designed to eliminate parallel traffic activation
- D.P.D.T. relay 2A contacts, adjustable time delay 1 - 60 seconds
- Operates on 12 OR 24VAC or DC, draws 60mA
- Three year warranty

AC-SREX100 (SREX-100)

ALARM CONTROLS ASSA ABLOY

Request to Exit Station

- 2.5" dia. mushroom button with 1 N/O & 1 N/C 10A mom. contact
- Mounted on S.S. plate, switch depth behind plate is 2"
- AC-TS21B black mushroom button
- AC-TS21G green mushroom button

AC-TS21R (TS-21R)

ALARM CONTROLS ASSA ABLOY

Large LED Remote Indicator Station

- 1/2" red LED operates on 12 or 24VDC
- Current draw 8mA @ 12VDC
- Mounted on stainless steel wallplate
- All standard paint finishes available

AC-RP28L (RP28L)

ALARM CONTROLS ASSA ABLOY

Indicating Shunt Switch

- D.P.D.T. switch, contacts rated 2A @ 35VDC
- Alternate action switch changes from black to orange
- Ideal for door shunting
- Mounted on stainless steel wallplate

AC-RP44 (RP-44)

ALARM CONTROLS ASSA ABLOY

Request to Exit Station

- S.P.D.T. contacts rated 2A @ 35VDC
- Illuminated w/high brightness LED, no bulb replacement
- Custom legends are available
- UL and CUL listed, lifetime warranty

AC-TS2 (TS-2)

Request to Exit Station with Timer

- S.P.D.T. timed output, 2 to 45 seconds adjustable time delay. Contacts rated 2A @ 35VDC.
- Illuminated w/high brightness LED, no bulb replacement
- UL and CUL listed, lifetime warranty

AC-TS2T (TS-2T)

REX Station With Two Switches

- Two S.P.D.T. switches, contacts rated 2A @ 24VDC
- Illuminated w/high brightness LED, no bulb replacement
- Custom legends are available
- UL and CUL listed, lifetime warranty

AC-TS22 (TS-2-2)

Pneumatic Time Delay REX Station

- Requires no external power
- One N/O & one N/C contacts, 10A @ 120V
- Time range adjustable from 2 to 60 seconds
- Lifetime warranty

AC-TS14 (TS-14)

Under Counter/Desk Door Release

- Momentary pushbutton
- S.P.D.T. 4A @ 28VDC contacts
- Pushbutton protected with guard ring
- Lifetime warranty

AC-TS18 (TS-18)

Piezoalert Wallplate

- Single gang stainless steel wallplate with 3/4"
- Diameter hole for piezoalert sounder

AC-RP23 (RP-23)

Request to Exit PIR

- New - now with built-in spike protection
- Dual form C relays with adjustable latch time
- 12 or 24 Volt operation
- Also available in black DS151i

DS-DS150i (DS150i)

BOSCH

Request to Exit PIR

- New - now with built-in spike protection
- Dual form C relays with adjustable latch time
- 12 or 24 Volt operation; also avail. in black DS161
- Sounder for forced door alert

DS-DS160 (DS160)

Camden DOOR CONTROLS

ADA

Economy 'Exit' Pushbutton

- Narrow width
- 1" ADA compliant red button
- Industrial grade stainless steel faceplate
- Heavy duty SPDT momentary contact, 15 Amps

CM-2507 (CM-2507)

Camden DOOR CONTROLS

ADA

Economy Illuminated 'Request to Exit' Switch

- Industrial grade stainless steel faceplate
- 2", green button, 'Push to Exit'
- Heavy duty SPDT momentary contact, 10 Amps
- UL 294 compliant

CM-30E (CM-30E)

Camden DOOR CONTROLS

ADA

Illuminated 'Request to Exit' Switch with 30 Second Timer

- Exclusive double break circuitry guarantees switch operation
- Heavy duty SPDT momentary contact, 10 Amps
- Deep in-wall back box included
- UL 294 compliant

CM-30EE (CM-30EE)

Camden DOOR CONTROLS

ADA

'Universal' Illuminated Pushbutton

- 2" square button w/(12) English & Spanish message labels
- Industrial grade stainless steel faceplate
- Heavy duty SPDT momentary contact, 10 Amps
- UL 294 compliant

CM-30U (CM-30U)

Camden DOOR CONTROLS

ADA

Mushroom 'Request to Exit' Switch

- Single gang stainless steel faceplate w/1 5/8" Red Button
- Engraved, paint filled 'PUSH TO EXIT'
- N/0 and N/C, DPST momentary contacts, 10 Amp
- UL 294 compliant

CM-420PTE (CM-420PTE)

Camden DOOR CONTROLS

ADA

Pneumatic Time Delay REX Switches

- 1/4" thick alum. face plate and large palm button
- 1-60 second adjustable timer, DPST (Form Z) contact
- UL 294 compliant

CM-5085GPTE

- Green Button

CM-5085RPTE

- Red Button

GET IT NOW!

Camden DOOR CONTROLS

ADA

Touchless Switches

- For public health and convenience
- Adjustable operating range 1 - 26"
- Adjustable time delay 1–5 seconds
- 12/24V AC/DC, heavy duty 5 Amp relay

CM-3243 (CM-3243)

Camden DOOR CONTROLS

Blue Metal Emergency Pull Station

- Ideal for power disconnect of mag locks on exit doors
- Heavy-duty aluminum construction
- Standard single gang mount

CM-701 (CM-701)

- (1) N/C contact, rated 5 Amps

GET IT NOW!

CM-702

- (2) N/C contacts, rated 5 Amps

Camden DOOR CONTROLS

All Metal Vandal Resistant Switch

- 7/8" mechanical steel button
- 1/4" thick aluminum faceplate
- 6 Amp DPDT form 'C' contacts
- Lifetime warranty

CM-9080 (CM-9080)

GET IT NOW!

Camden DOOR CONTROLS

Single Gang LED Annunciator

- Super bright LEDs for high visability
- Text/Graphics message invisible when not illuminated.
- (4) insert message labels included
- Weather and vandal resist construction
- 12/24VDC

CM-AF500 (CM-AF500)

Camden DOOR CONTROLS

Heavy Duty Key Switches

- The industry standard for indoor/outdoor applications
- Single gang, one-piece cast aluminum design
- Accepts 1" to 1-1/4" mortise cylinders, sold separately
- Shown with optional cylinder and LEDs

CM-1120 (CM-1120)

- SPDT momentary

GET IT NOW!

CM-100060KD

- Mortise cylinder, keyed different.

CM-1130

- SPDT maintained key switch

Camden DOOR CONTROLS

7 Day Timer

- 8 daily/weekly 'on'/'off' schedules
- SPDT contacts rated 16 Amps @ 30V, N/O + N/C

CM-CX24712 (CX-247-12)

- Model 12VAC/DC

CM-CX24724 (CX-247-24)

- Model 24VAC/DC

DSI DETROIT SECURITY, INC. A Dorma Company

ES5200 Entry Sentry Tailgate Detection

- Mounts easily on standard door frames and hallway walls
- High throughput (30-45 people per minute) dependent on the access control system
- Integrated Lock Control Relay helps provide faster throughput
- Integrated door prop alarm

D2-ES5200R0 (ES5200R0)

DSI DETROIT SECURITY, INC. A Dorma Company

Battery Operated Door Prop Alarm

- Easy to install
- Reliable
- Economical
- Tamper resistant
- UL Listed

D2-ES300 (ES300)

DSI DETROIT SECURITY, INC. A Dorma Company

c UL us

Battery Operated Exit Alarm

- Low cost, completely self contained
- Optional weatherized units available
- Longer battery life
- Secure, tamper resistant housing
- Quick, easy installation

D2-ES500 (ES500)

DSI DETROIT SECURITY, INC. A Dorma Company

Exit Alarm

- 2-gang flush mount with tamper proof screws
- 12-24 gang VAC/VDC @ 200mA
- SPDT alarm contact out
- Remote reset/bypass input
- Adjustable auto reset or can be configured to latch into alarm

D2-ES430K3T0 (ES4300A-K3-T0)

D2-ES430K3T1 (ES4300A-K3-T1)

- T1 option includes tamper switch

DSI DETROIT SECURITY, INC. A Dorma Company

Door Management Alarm

- Local and remote alarm
- Adjustable alarm delays
- Reduces false alarms
- Interfaces with other access control equipment
- Door prop/door held detection
- Door intrusion/door forced detection

D2-ES420K3T0 (ES4200-K3-T0)

D2-ES420K3T1 (ES4200-K3-T1)

- T1 option includes tamper switch

DynaLock™ For Life™

IP68 Weatherproof Pushbutton

- Blank faceplate or 5 optional signage models
- Heavy duty water & dust-tight switch
- SPDT Form-Z, 3 Amp contacts
- Faceplate gasket & anti-tamer screws included
- DynaLife® lifetime warranty

DY-6171 (6171)
DY-6172 (6172)
DY-6173US32D (6173)
DY-6175 (6175)
DY-6176 (6176)

DynaLock™ For Life™

Pneumatic Delay Egress Pushbutton

- Life safety code compliant
- 30 second minimum delay
- 10 Amp SPDT-DB contacts
- 1-5/8" diameter red button

DY-6290 (6290-US32D)

DynaLock™ For Life™

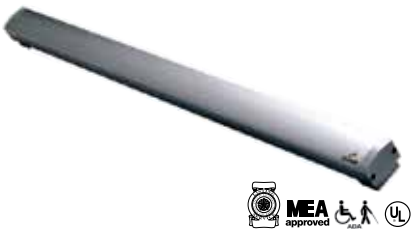

Exit Sensor Push Bar

- Reliable, adjustment-free dual optical sensors
- Redundant microswitch for triple fail-safe operation
- 12-24VAC/VDC input, DPDT relay output
- Heavy duty all-metal construction, including end caps
- DynaLife® lifetime warranty

DY-645136 (6451-36-US28)

Essex Electronics

Rugged Illuminated Piezoelectric Switch

- Single gang "PUSH TO EXIT" (Mullion "PUSH TO EXIT" EX-PEBSSN2)
- IP66 Rated, weather and vandal resistant, stainless steel construction
- 2 outputs, 1 N/O, 1 N/C (2A 30VDC), built in adjustable 1-40 sec output time
- Limited lifetime warranty, custom faceplate graphics available
- Selectable illumination, Relay On/Off: red, green or none

EX-PEBSS2US (PEBSS2-US)

Essex Electronics

Hand-E-Tap® Heavy Duty Access Switch

- Single gang Piezoelectric Switch, Stainless bezel with ADA Wheelchair
- IP66 Rated, weather and vandal resistant, stainless steel construction
- 1 SPDT Relay (8A 30VDC), Programmable output toggle or 1-60 sec
- Limited lifetime warranty, custom faceplate graphics available
- Audio and illumination feedback

EX-PHSS1US (PHSS1-US)

Essex Electronics

Stainless Touchless Switch

- Advanced Touchless Microwave Technology. Adjustable 1" to 18" Detection Range.
- Stainless Steel Construction. Audio and Bicolored Visual Feedback.
- Pulse or Toggle Output. Single Gang or Mullion (HEW-1).

EX-HEW2 (HEW-2)

interlogix

Dual Technology Request-To-Exit Motion Sensor

- Built-in adjustable sounder for door position monitoring
- Includes mask for easy adjustment of field of view
- Tamper switch detects when device is open
- Swing open design for easy adjustment
- Available in white, gray or black

SR-RCRREXW (RCR-REX-W)

Honeywell

Request to Exit PIR with Sounder

- Easy to install-Ideal for both retrofits and new installations
- Generous amount of wiring room allows easy install
- Tamper proof shutters allow precise target area detection

CK-IS320BL

- Black

CK-IS320WH

- White

RCI

908 Exit Mushroom Button

- Ideal for request-to-exit apps. to release electromagnetic locks
- Momentary, maintained or time-delay switches available

RU-908MO32D (R908REMO9)

GET IT NOW!

RCI

972 All-in-One Illuminated Pushbutton

- Available with integrated 30 sec. timer
- Large 2" (50.8mm) square illuminated pushbutton, SPDT 10 Amp Contacts. Incl. 3 colored lenses: Green, Red, Clear
- Push To Exit, Exit messages and Handicap Symbol included (in English and Spanish)

RU-972IESMO9 (R972IESMO9)

RCI

915AFI Active Focused Infrared (For High Security)

- The 915AFI is an active infrared, request-to-exit detector specifically designed for access control applications where maximum protection is required.
- Mounts on or above the door frame with infrared beam directed near door hardware

RU-915AFIB (R915AFIB)

RCI

909 Rocker Switch

- Surface mount under desk or counter for concealment
- 2 yr limited warranty
- Smooth action rocker with engraved key symbol
- Avail. with momentary or maintained action

RU-909SMOW (R909SMOW)

GET IT NOW!

Illuminated RTE Plates with 1-180 SeTimer

- Push-to-exit button with switchable English, Spanish and French messages
- Illuminated square green push button
- NO/NC contacts rated 10 @ 125VAC

SL-SD7202GCP (SD-7202GC-PTQ)

Request-to-Exit Plates

- SL-SD7103GCP: slimline, illuminated square button "push to exit"
- SL-SD7213GSP: single-gang, green mushroom button, "push to exit" pneumatic timer
- SL-SD8202GTP: single-gang, illuminated square button, "push to exit" built-in RF transmitter

SL-SD7103GCP (SD-7103GC-PEQ)

SL-SD7213GSP (SD-7213-GSP)

SL-SD8202GTP (SD-8202GT-PEQ)

No-Touch Request-to-Exit Sensor

SL-SD927PKCN (SD-927PKC-NEQ)
- Single-gang

SL-SD927PCSQ (SD-927PKC-NSQ)
- Single-gang, Spanish

SL-927PKCNFQ (SD-927PKC-NFQ)
- Single-gang, French

SL-SD927PWCQ (SD-927PWCQ)
- Single-gang, white

SL-SD9163KSQ (SD-9163-KSQ)
- Slimline, English, weather-resistant, built-in timer

SL-SD9263KSQ (SD-9263-KSQ)
- Single-gang, English, weather-resistant, built-in timer

SL-SD9163KSV (SD-9163-KSVQ)
- Slimline, built-in timer, manual override button, weather-resistant, English

SL-SD9263KSV (SD-9263-KSVQ)
- Single-gang, built-in timer, manual override button, weather-resistant, Spanish

Illuminated Push-to-Exit Plate

- Large 2" square illuminated pushbutton
- Includes "PUSH TO EXIT" and "PRESIONE PARA SALIR" message plates
- NO/NC Contacts rated 10A @ 125VAC
- Available with single gang or slimline and metal or white plastic

SL-SD7202GCQ (SD-7202GCPEQ)

Toggle Switch

- SPST toggle switch rated 3A@125VDC
- Attractive white plastic case
- 2 screw holes and pre-wired 6" (15cm) leads for easy surface mounting

SL-SS076SW (SS-076Q/SW)

Push-to-Exit Bars

- Allows exit from inside while locked from outside
- Reversible non-handed design
- For metal or wood doors

SL-SD962A36G (SD-962AR3GG)
- Grade 1 rim-type exit device, UL

SL-SD962HL4A (SD-962HL-4A)
- Entry-type lever trim for SL-SD962AR36A and SL-SD962AR3G

SL-SD961A36 (SD-961A-36)
- Built-in dual contact switches

SECURITRON ASSA ABLOY

Time Mate Timer

- Timer extends momentary switches up to 36 seconds
- Apps. include releasing electric locks & shunting alarm contacts. Fits in the backbox or can be mounted separately. DIP switch selectable time setting - 3A SPDT relay.

SN-TM9 (TM9)

SECURITRON ASSA ABLOY

MEA approved UL

Mortise Keyswitch

- Momentary, alternate, single gang and narrow stile available. 12/24VDC, bi-color LED - 5A rated plunger switch.
- Add'l switch position on backing allows another switch to be activated by turning key in the opposite direction
- SN-MKC optional Cylinder Available

SN-MK (MK)

GET IT NOW!

SECURITRON ASSA ABLOY

UL

Exit Motion Sensor

- Passive infrared sensor reliably releases
- Automatically cuts power to the lock which allows individuals to exit without even realizing the door is secured
- Adjustable time relock and REX output
- Fully adjustable beam pattern

SN-XMS (XMS)

SECURITRON ASSA ABLOY

UL

Emergency Exit Push Button

- Offers additional safety as required by code
- Momentarily pressing the button releases the door for 30 seconds. SPDT 3A normally closed wet contacts.
- Includes red/green HC lenses

SN-EEB3N (EEB3N)

SN-EEB2 (EEB2)

GET IT NOW!

SECURITRON ASSA ABLOY

PB Series Push Buttons

- Includes switchable green, red and blue ADA lenses
- Red LED on plate where applicable. 5 Amp rate contacts.
- Stainless steel single gang plate: 4.5" x 2.75" [114mm x 70mm]

SN-PB2 (PB2)

SN-PB (PB)

GET IT NOW!

SECURITRON ASSA ABLOY

PB2 Series Push Buttons

- Easy to read 2" size, 5 Amp rated contacts
- Includes interchangeable green, red and blue ADA lenses
- Stainless steel single gang plate: 4.5" x 2.75" [114mm x 70mm]

SN-PB2E (PB2E)

GET IT NOW!

SECURITRON ASSA ABLOY

PB3 Series Push Buttons

- 3 Amp rated contacts
- Includes interchangeable green and red lenses
- Field convertible from DPST to DPDT
- Stainless steel single gang or narrow stile plates available

SN-PB3EN (PB3EN)

SECURITRON ASSA ABLOY

Touch Sense Bar

- Patented Touch Sensing technology
- No mechanical movement - no parts to wear out
- Works with aluminum, wood and metal clad doors
- Can be field cut to fit non-standard openings

SN-TSBCL (TSBCL)

Safety Technology International, Inc.

Universal Button

- Over 300 different combinations in one kit
- Everything required to provide what the customer needs
- 2 sets of Form "C" contacts
- SF-LT1 – Latching/Timer Module

SF-UB1 (UB-1)

Safety Technology International, Inc.

Universal Pneumatic Button

- Pneumatic adjustable timer button
- Opens/Closes circuit and has a timed delay before reset
- No electricity required
- Form "Z" contact, 1 N.O., 1 N.C.

SF-UB1PN (UB-1PN)

Safety Technology International, Inc.

Exit Stopper® Multifunction Door Alarm

- Helps stop unauthorized exits and entries
- 95/105 dB horn sounds when activated
- Alarm mode can be set for 30 seconds, 3 minutes or continuous. SF-6400WIR4 - Supervised Wireless Model.

SF-6400 (STI-6400)

Safety Technology International, Inc.

Exit Sign Damage Stopper®

- Protects sign from vandalism & accidental damage
- Heavy duty; fast & easy installation
- 9-ga. steel wire w/corrosion resistant polyester
- Simple removal for bulb replacement

SF-9640 (STI-9640)

TAKEX

Request-to-Exit Door Sensor

- Overhead or Wall Mounting options
- Suitable for Single or Double doors
- Two "Heavy-Duty" Form "C" Relay Outputs (up to 1A) for controlling door Strikes and Magnetic Locks
- Fail Safe/Fail Secure selectable
- Available in White (PS-520W), Silver (PS-520S)

PU-PS520W

- White

PU-PA520S

- Silver

Visonic®
For a secure way of life

PIR Motion Detector

- Use with access control & automatic door controls
- 1-98 sec. timer
- 12/24V AC/DC with quiet relay

VS-DA5

ALARM CONTROLS ASSA ABLOY

Waterproof Digital Keypad

- Flush mount, mounts on single-gang electrical box
- REX input, 5 Amp relay, one transistor output
- Heavy duty design with backlit metal keys
- Operates on 12 or 24 Volts AC/DC, auto voltage sensing
- Lifetime warranty

AC-KP200 (KP-200)

ALARM CONTROLS ASSA ABLOY

Self-Contained Digital Keypad

- Vandal resistant, weather- & dust-proof to IP66 code
- Metal backlit keys for visibility in dark areas
- Two programmable S.P.D.T. relays, built-in buzzer
- Stainless steel faceplate, black cast aluminum back box
- Lifetime warranty

AC-KP400 (KP-400)

Camden DOOR CONTROLS

Indoor Stand Alone or Wiegand Keypad

- 999 users, fixed or variable 1 – 8 digit codes
- (2) 3 Amp Form 'C' relays, with independent control
- Programmable 1 - 255 second time delay
- Anti-tailgating, latch mode and global lock out
- Option for plug-in wireless transmitter

CM-120i

Camden DOOR CONTROLS

Outdoor Stand Alone or Wiegand Keypad

- All metal, weather and vandal proof, back-lit keypad
- 999 users, fixed or variable 1 – 8 digit codes
- (2) 3 Amp. Form 'C' relays, with independent control
- Programmable 1 - 255 second time delay
- Option for plug-in wireless transmitter

CM-120WV2

DynaLock™ For Life®

Vandal and Weather Resistant Keypad

- Single-gang or narrow mullion mount models
- 500 users, 3 user levels, 3 access levels per user
- 12-24VDC or 16-24VAC input, 2-SPDT outputs
- IP65 rated water and dust resistant
- DynaLife® lifetime warranty

DY-7300 (7300)

DY-7350 (7350)

DynaLock™ For Life®

Indoor/Outdoor Lighted Keypad

- Single-gang or narrow mullion mount models
- 500 users, 3 user levels, 3 access levels per user
- 12-24VDC or 16-24VAC input, 2-SPDT outputs
- IP65 rated water and dust resistant
- DynaLife® lifetime warranty

DY-7400 (7400)

DY-7450 (7450)

Keypads

Essex Electronics

Professional Grade Keypad Readers

- 26-Bit Wiegand, Single Gang, Piezoelectric Keypad, UL 294 Listed, CE Compliant, IP66 Rated, -40 F to +160 F, 100% Relative Humidity, Stainless Steel Construction, Superior vandal resistance, Limited Lifetime Warranty. Additional formats: 8 Bit (163), Serial (983) or RS-485 (4853). Bezel: Stainless (SN), Black (KN), Brass (BN)

EX-KT103SN (KTP-103-SN)

Essex Electronics

Heavy Duty Self Contained Keypads

- 500 User, 12-24VDC In/Out, 1 SPDT 2 Amp Relay, two ¼A Open Collector Outputs Adjustable
- Output Time, Rex, Latching, Tamper Alarm, Keypad Programmable, Bezel: Stainless (S), Black
- (K), Brass Bezel (B)

EX-SKE34S (SKE-34S)

Essex Electronics

Thinline Keypad Readers

- 26-Bit Wiegand, Mullion Mount Piezoelectric Keypad, UL 294 Listed, CE Compliant. IP66 Rated,
- -40 F to +160 F, 100% Relative Humidity, Limited Lifetime Warranty. Additional formats:
- 8 Bit (162), Serial (982) or RS-485 (4852). Overlay: Stainless (SN) or Black Illuminated (LI)

EX-KT102SN (KTP-102-SN)

Essex Electronics

Thinline Self Contained Keypads

- 500 User, 12-24VDC In/Out, 1 SPDT 2 Amp Relay, two ¼A Open Collector Outputs Adjustable Output Time, Rex, Latching, Tamper Alarm, Keypad Programmable. Overlay: Stainless (S) or
- Black Illuminated (I)

EX-SKE26S (SKE-26S)

IEI Now Part of Linear Building On Innovation.

2000 Series e-Style Access Control

- 500 user stand-alone keypad
- 2 SPDT on-board relays
- Expansion to 10 outputs with IE-20008EX
- Backlit hardened keys

IE-2000E (0-294021)

IEI Now Part of Linear Building On Innovation.

2000 Series eM-Style Access Control

- 500 user stand-alone keypad
- 2 SPDT on-board relays
- Expansion to 10 outputs with IE-20008EX
- Braille metal alpha-numeric keys

IE-2000EM (0-294022)

Prox.pad® Integrated Proximity Control

- 2,000 users
- 2,000 event audit trail
- Bi-color LED to indicate operation
- 26 to 37-bit format card compatibility

IE-PROXPAD (0-205676)

SE-Style Sealed Environment Keypads

- Indoor/Outdoor weather resistant, self-contained metal housing
- Metal alpha-numeric keypad, surface mount vandal resistant design. (4) On-board programmable timed relays.
- 1-pc. housing suitable for wall, post or gooseneck mounting

IE-212SE (0-212140)

iLM – Style Backlit Mullion Keypads

- Indoor/Outdoor weather resistant surface mount
- Backlit numeric keypad
- Doorbell button
- Mullion narrow-mount vandal resistant design
- Aluminum (AL) or Bronze (BZ) finish

IE-232iLMAL (0-230800)

IE-232iLMBZ (0-230801)

- (1) SPDT 2 Amp relay
- (3) 1 Amp SPDT access relays
- Door position monitoring
- Door ajar, forced door, alarm shunt outputs

w-Style Weather Resistant Keypads

- Numeric membrane keypad, 120 individual PIN codes
- 12-14VDC/VAC auto voltage sensing (AVS)
- (1) On-board programmable timed relay, (3) Negative sync outputs. Indoor/Outdoor flush mount design.

IE-212W (0-211222)

iLW Architectural Backlit Keypads

- Indoor/outdoor weather resistant flush mount
- Backlit numeric keypad
- Chrome finished metal trim
- (1) SPDT on-board relay (outdoor)

IE-212iLW (0-230722)

i-Style Indoor Flush Mount Keypad

- Indoor flush mount design
- Numeric keypad
- 12-14VDC/VAC auto voltage sensing (AVS)
- 120 individual PIN codes

IE-212i (0-211111)

- (1) On-board programmable timed relay
- (3) Negative sync outputs

IE-232i (0-213111)

- (1) SPDT 2 Amp relay
- (3) 1 Amp SPDT access relays
- Door Position Monitoring
- Door ajar, forced door, alarm shunt outputs

Stand Alone Keypads

- Egress input. Stainless-steel face.
- Built-in buzzer
- Surface mount with included back box or flush mount

SL-SK1011SQ (SK-1011-SQ)

- 100 users, 1 relay output

SL-SK1131SQ (SK-1311-SQ)

- 130 users, 2 relay outputs, transistor ground, backlit

Outdoor Illuminated Keypads

- 101 user codes
- Individual keys backlit for night time use
- Key light can be dimmed or turned off during standby
- Tamper switch, security screws and heavy-duty construction for vandal resistance

SL-SK1123SQ (SK-1123-SQ)

- Surface mount, 2 relay outputs

SL-SK1123FQ (SK-1123-FQ)

- Flush mount, 1 relay, 1 transistor ground

SL-SK3523SDQ (SK-3523SDQ)

- Rugged outdoor keypad, 2 relay outputs, 210 users

Sealed-Housing Outdoor Stand-Alone Keypads

- 1010 user codes, illuminated keys
- 12~25VDC operation
- 2 Form C relays, each rated 1A @ 30VDC
- Circuitry is potted with epoxy for outdoor use

SL-SK1323SDQ (SK-1323-SDQ)

- Standard keypad

SL-SK1323SPQ (SK-1323-SPQ)

- Built-in proximity card reader

Mullion-Style Outdoor Stand-Alone Keypad

- 1010 user codes, illuminated keys
- 12~25VDC operation
- 2 Form C relays, each rated 1A@30VDC
- Circuitry is potted with epoxy for outdoor use

SL-SK2323SDQ (SK-2323-SDQ)

- Mullion-style keypad

SL-SK2323SPQ (SK-2323-SPQ)

- Mullion-style, built-in proximity card reader

SL-SK2323SPA (SK-2323-SPAQ)

- Piezoelectric mullion-style, built-in proximity card reader

Bopper Stopper® Protective Cover

- Protects devices against vandalism & accidental damage
- Torsion spring maintains cover in closed position
- 3 year guarantee against breakage of polycarbonate in normal use. Fast and easy installation.

SF-6518 (STI-6518)

eForce 3090 Prox Keyless Entry

- Expanded eForce Platform with integrated HID® Prox contactless card reader (iClass version and keypad versions also available)
- Interfaces with any Wiegand protocol access control system
- Models to operate Adams Rite latches, exit devices and deadbolts
- Non-handed clutched lever
- Die cast housing and lever in satin chrome or dark bronze finish

R8-3090P (3090 Prox, 3090 iCLASS)

125 kHz LF Proximity Access Control Readers

- 125 kHz. Read range from 2" to 24".
- Metal compensate technology provide trouble free installation
- Lifetime warranty.125 kHz LF cards & tags.

AH-SR2400G (SR-2400-GR-0)

AH-MM6800 (MM-6800-GR-0)

AH-KP6840GR0 (KP-6840-GR-0)

AH-MR1824G0 (MR-1824-G-0)

902-928 MHz UHF Perimeter Access Control Readers & Accessories

- Read Range from 6-25 feet! Battery Free Credentials, Automatic Vehicle Identification (AVI) and Access Control applications such as Parking Entry and Gate Control

AH-LR2000BU (LR-2000-B-U)

AH-LR3000BU (LR-3000-B-U)

AH-612MU (612-M-U)

AH-UA612MU (UA-612-M-U)

Multi-Technology Mullion Proximity Card Reader

- Reads CDVI and most popular 26-bit Wiegand card encoding
- High performance read range
- Audible and visual feedback
- Also available in white

CV-STARPB (STARPB)

Multi-Technology Proximity Card Reader

- Reads CDVI and most popular 26-bit Wiegand card encoding
- Illuminated card reader (blue, green and red)
- PCB sealed in epoxy
- Also available in white

CV-SOLARPB (SOLARPB)

PiezoProx® Keypad/Card Reader

- Piezoelectric Keypad and 125kHz Proximity Reader with Genuine HID Technology, IP66 Rated, -40 F to +160 F, 100% Relative Humidity, Stainless Steel Construction, Superior vandal resistance, Laser Marked Graphics. Bezel: Stainless (SN), Black (KN), Brass (BN)

EX-PPH103SN (PPH-103-SN)

- 26 Bit Wiegand Keypad with HID 125kHz Proximity

EX-PPH163SN (PPH-163-SN)

- 8 Bit Keypad with HID 125kHz Proximity

Proximity Readers & Credentials

Essex Electronics

T-Prox™ Keypad/Card Reader

- Piezoelectric Keypad and 125kHz Proximity Reader with Genuine HID Technology, IP66 Rated, -40 F to +160 F, 100% Relative Humidity. Overlay: Stainless (S) or Black Illuminated (I)

EX-TPX26I (TPX-26I)

Essex Electronics

RoxProx™ Rugged Proximity Readers

- 125kHz Proximity Reader with Genuine HID Technology, IP66 Rated, -40 F to +160 F, 100% Relative Humidity, Stainless Steel Construction, Superior vandal resistance. Audio and bi-colored illumination feedback.

EX-PRX1 (PRX-1)

- Mullion globe (blue/green)

EX-PRX1R (PRX-1R)

- Mullion RFID (red/green)

EX-PRX2 (PRX-2)

- Single-gang globe (blue/green)

EX-PRX2R (PRX-2R)

- Single-gang RFID (red/green)

Essex Electronics

iRox™ Rugged Smart Card Readers

- iCLASS SE® 13.56MHz High frequency and MultiCLASS SE® 13.56MHz plus 125kHz Proximity Readers with Genuine HID Technology, IP66 Rated, -10 F to +160 F, 100% Relative Humidity, Stainless Steel Construction, Superior vandal resistance. Audio and bi-colored illumination feedback.

EX-IRX1 (IRX-1)

- Mullion iRox iCLASS SE® Reader

EX-IRX2 (IRX-2)

- Single Gang iRox iCLASS SE® Reader

EX-IRXP1 (IRXP-1)

- Mullion iRox MultiCLASS SE® Reader

EX-IRXP2 (IRXP-2)

- Single Gang iRox MultiCLASS SE® Reader

HID

HID Global MiniProx Reader

- 125 kHz mullion mount proximity card reader
- Slim, attractive design w/choice of cover style & color
- Optional hazardous location version available
- Read range of 1 in. - 5.5 in. Lifetime warranty.

HU-5365EGP00 (5365EGP00)

HID

HID ProxPro Reader

- Mounts directly on metal w/ minimal impact on read range performance. Optional kit enables mounting behind glass.
- Read range of 2 in. Lifetime warranty
- Dim: 5.0 in. x 5.0 in. x 1.0 in. (12.7 x 12.7 x 2.5 cm)

HU-5455BGN00 (5455BGN00)

HID

125kHz Proximity Credentials

- HID 125 kHz RFID technology proximity cards are recognized as the industry standard for physical access control
- Price competitive with all card technologies
- Thin enough to carry in a wallet or handbag
- Available proximity technology and photo quality surface on some models to allow identification capability and security on a single card
- Wiring options for some readers either Pigtail or Terminal
- Power requirements for most readers 5-16VDC
- HID ISO standard cards are compatible with Fargo and many other card imaging manufacturers
- Lifetime warranty

HU-1326 Series

- Prox Card II clamshell card

HU-1336 Series

- DuoProx® II with magnetic stripe

HU-1346 Series

- Key fob

HID

HID PROXKEY II - Key Fob

- Features:
  - * Place on a key ring for convenient entry
  - * Universal compatibility with all HID Proximity readers
  - * Can be programmed with any standard HID Proximity format
  - * Lifetime warranty

HU-1346LNSMN (1346LNSMN)

Honeywell

OmniClass Keyfobs

NC-OKK2N26R (OKK2N26R)

- OmniClass 16K bits smart keyfob
- 26-bit Wiegand format

NC-OKK2N34R (OKK2N34)

- OmniClass 16K bits smart keyfob
- 34-bit HAS format holds more information

Honeywell

OmniProx 125 kHz Proximity Readers

- Come with three color bezels (black, charcoal and ivory)
- Optical tamper, security screw & adhesive mounting template included. Mini Mullion mount.
- Covered by Honeywell's lifetime warranty

NC-OP10HON (OP10HONR)

Honeywell

OmniProx 125 kHz Proximity Readers

- Mullion mount reader
- 5.71" x 1.69" x 0.79"
- Lifetime warranty

NC-OP30HON (OP30HONR)

Honeywell

Optical Tamper & Security Screw

- Wall mount reader
- 4.33" x 2.59" x 0.59"
- Lifetime warranty

NC-OP40HON (OP40HONR)

Honeywell

OmniProx 125 kHz Proximity Readers

- Vandal resistant mount
- 4.75" x 3.00" x 0.82"
- Lifetime warranty
- Optical tamper & security screw

NC-OP90HON (OP90HONR)

Proximity Readers & Credentials

Wiegand Output Receiver

- Add transmitter to ANY access control panel
- Long read range
- 3-500' field adjustable read range
- Rugged cast aluminum outdoor housing
- 26-bit, 30-bit & 31-bit Wiegand output

LN-AMWOR (ACP00727)

Weigand 125 kHz HID Compatible Proximity Cards

- HID compatible ProxCard II cards
- Wiegand 125 kHz Proximity Cards, HID compatible
- Standard 26-bit format, Pre-punched in portrait orientation
- Sold in lots of 25

IE-PROXCARD2 (0-297401)

truPortal T-200 Series Reader

- TruPortal T-200 Series Reader, mini-mullion mount

K6-TPRDR200A (TP-RDR-200A)

truPortal T-100 Series Reader

- TruPortal T-100 Reader, mini-mullion mount

K6-TPRDR100A (TP-RDR-100A)

IMAGE NOT SHOWN

truPortal Dual-Frequency Enrollment Reader

K6-TPRDRLRN (TP-RDR-LRN)

truPortal Access Control Credential

- TruPortal Credential, MIFARE® Classic Keyfobs Plano TruPortal Orange, 25-pack

K6-MFCKOG25P (TP-MFC-KF-OG-25PK)

truPortal Access Control Credential

- TruPortal Credential, HID® Prox Keyfobs, 50-pack

K6-PRXKF50P (TP-PRX-KF-50PK)

Keri's MS Series Readers:

KF-MS5000BX

- Keri MS-Series wall switch reader for single-gang switch-box mount

KF-MS3000X

- Keri MS-Series mullion-mount reader for door and window mullion

KF-MS7000BX

- Keri MS-Series extended range reader for additional read range

KF-MS4000X

- Keri MS-Series vandal resistant reader

Accessories:

KF-KE8

- Enclosure, holds 4 PXL or NXT Controllers

KF-KWX24

KF-KWX9A

- Wireless transceivers in two frequencies for wireless to remote doors

Keyscan Proximity Reader/Keypad

- When Pin & Prox is desired use this stylish and reliable keypad/proximity reader
- Utilizes one reader port
- Works with Keyscan 125 kHz compatible proximity cards (CS125-36)
- Limited lifetime warranty against defects in materials & workmanship

CQ-KKPR (K-KPR)

Keyscan Proximity Reader

- 2-in-1 unit for mullion or single-gang installation
- Use 125 kHz compatible proximity cards (CQ-CS12536)
- Limited lifetime warranty against defects in materials and workmanship

CQ-KPROX2 (K-PROX2)

Keyscan RF Receiver RF Fobs with Proximity Chip

- Combines convenience of long range fob with onboard chip for use with 125kHz (use K-TX2) or *Indala (use K-INTX2) readers
- Ideal solution for parking gates & parking garage type applications
- Permits tracking, usage reporting & assigning access privileges

* Equipped with battery rundown protection

CQ-KRX (K-RX)

CQ-KTX2 (K-TX2)

CQ-KINTX2 (K-INTX2)

Keyscan HID Standard Proximity Card

- HID-C1325 proximity cards are pre-configured for Keyscan 36 Bit wiegand output which adds a further level of security
- Proximity cards need only be placed within proximity of their readers to activate the system

CQ-HIDC1325 (HID-C1325)

Proximity Readers & Credentials

Keyscan ISO PROX II Graphics Quality Card

- Package of 50 cards with Keyscan's 36-bit format
- Keyscan does not duplicate 36-bit cards
- Glossy cards with a polished finish on both sides for best quality dye sublimation printing
- Cards may be printed edge to edge on both sides

CQ-HIDC1386 (HID-C1386)

ACT31B 1-Channel Block Coded Transmitter

- Compatible with all Linear access receivers and controllers
- Supplied with quick-disconnect key ring
- Sold in lots of 10
- Power: Two 2016 batteries
- Codes: Factory block coded in MegaCode format
- RF frequency: 318 MHz
- Dimensions: 1.25" W x 2.25" H x .48" D

LN-ACT31B (ACP00879)

DXS Block Coded - MegaCode Transmitters

- The Model ACT-34B 4-Channel Block Coded Key Ring Transmitter, compatible with all Linear access receivers and controllers
- Supplied with quick-disconnect key ring
- Sold in lots of 10
- Power: Two 2016 batteries
- Codes: Factory block coded in MegaCode format
- RF frequency: 318 MHz
- Dimensions: 1.25" W x 2.25" H x .48" D

LN-ACT34B (ACP00872)

Magstripe Reader

- Use with virtually any panel
- UL294 Listed for outdoor use
- Mag or Wiegand output
- Extended temp range -40˚ C to +75˚ C
- Reader with keypad also available (MS-MR2012)
- Accessories - (MS-WP10, MS-WP20, MS-WS10)

MS-MR1012 (MR1012)

nedap | identification systems

TRANSiT Standard Long Range RFID Reader

- 33' read range
- Reads at object speeds up to 125 mph
- Highly reliable reads under all conditions
- Reader outputs Wiegand, RS-232, TCP/IP and more

2N-9875220 (9875220)

TRANSiT Entry Medium Range RFID Reader

- 12' range RFID reader for personnel and vehicle access
- Optional HID Prox card compatibility
- Easy integration - outputs Wiegand, RS-232, TCP/IP & more
- Ideal for secure, long range door access applications

2N-9876200 (9876200)

TRANSiT Window Button Credential

- Long range vehicle ID tag for use inside vehicle windshield
- Single ID only
- Hands free
- 33' read range up 125 mph
- Ideal for perimeter access, parking, HOA residential

2N-9882650 (9882650)

2N-9882480 (9882480)

- User activated

uPASS Reach UHF RFID Reader

- Reads Nedap's exclusive HID Prox/ UHF combi-card
- 12' read range
- Also reads nedap gen 2 sticker tags
- Mounts directly to flat surface

2N-9945466 (9945466)

uPASS Access

- A revolution in door access control
- This small but powerful reader is small enough to mount on a door mullion but delivers 6 feet of read range with a UHF passive tag

2N-9206663 (9206663)

HID Prox Booster - Single & Dual ID

- Long range driver AND vehicle ID device
- Reads & transmits standard HID prox driver credential
- Defends against possible "Trojan Horse"
- Works with all Nedap TRANSiT readers
- Call for other card type compat-ability

2N-9948538 (9948538)

UHF/HID Prox Combi-Card

- Combines UHF & HID Prox for both long range and standard Prox access
- No batteries required
- Up to 9' of read range using UHF band and Nedap reader
- Compatible with HID standard prox readers
- Other formats available (min. order qnt. req.)

2N-9955836 (9953361)

2N-9955844

Proximity Readers & Credentials

Proximity Cards

- Operating cards EL stand-alone

F7-732034545 (QEL2-0 125kHz pair prox cards)

UltraSecure Proximity Credentials

- Industry standard 125 kHz RFID Proximity technology cards
- Fully compatible with existing proximity access control systems including custom card formats from 26 to 40 bits
- Available in both PVC and durable PET composite construction
- Optimized for photo-quality printing on Magicard and other card imaging printers without chip deflection
- Purchase programmed or custom program with the OnSite encoding system to reduce end-user lead times
- Lifetime warranty

UE-CLM Series

- UltraSecure Proximity Clamshell card

UE-ISO Series

- UltraSecure Proximity ISO card

UE-ISOMAG Series

- UltraSecure Proximity ISO card with magnetic stripe

Family of iCLASS SE Cards and Readers

- HID Global's iCLASS SE access control platform enables customers to future-proof their access control infrastructures while simplifying how identities are created, used and managed, across a broad continuum of application requirements using any combination of smart cards, microprocessor cards and Smartphones.

HU-920PTNNK0

HU-92PTNNG00

HU-910PTNNK0

HU-920NTNNK0

HU-920NTNNG0

GET IT NOW!

HU-910PTNNG0

iCLASS® Family of Credentials

- Available memory 2K, 16K or 32K
- iCLASS® 13.56 MHz credentials are offered as cards, tags, and keys. Offers the ability to store biometric templates and useful data using read/write capabilities. Communication between card and reader includes high security with mutual authentication, encrypted data transfer, and 64-bit diversified keys for read/write.
- Supports all existing HID card formats, including Corporate 1000. Multi-Technology cards available.
- Offers the ability to factory or field program any existing HID format into the secure HID access control application area. Lifetime warranty provided for all iCLASS® credentials!

HU-2080 Series

- Clamshell Card (2k Only)

HU-200x Series

- iClass® Printable Card

HU-205x Series

- iClass® Series Key

HU-206x Series

- Sticky Tag

OmniClass Stickers

NC-OKS2N26 (OKS2N26)

- OmniClass 16K bits smart sticker
- 26-bit Wiegand format

NC-OKS2N34 (OKS2N34)

- OmniClass 16K bits smart sticker
- 34-bit HAS format holds more information

OmniClass Smart Card Readers

NC-OM30BHOND (OM30BHOND)

- R-30 mini-mullion smart card reader, black, pigtail connection

NC-OM30BHONDT (OM30BHONDT)

- R-30 mini-mullion smart card reader, black, terminal block

NC-OM40BHOND (OM40BHOND)

- R-40 single-gang smart card reader, black, pigtail connection

NC-OM40BHONDT (OM40BHONDT)

- R-40 single-gang smart card reader, black, terminal block

NC-OM15BHOND (OM15BHOND)

- R-15 mullion smart card reader, black, pigtail connection

NC-OM15BHONDT (OM15BHONDT)

- R-15 mullion smart card reader, black, terminal block

NC-OM55BHOND (OM55BHOND)

- R-55 single-gang w/ keypad smart card reader, black, pigtail connection

OmniClass PVC SmartCards

NC-OKP0N26

- 2K, 26-bit Wiegand format

NC-OKP0N34

- 2K, 34-bit HAS format

NC-OKP2N26

- 16K, 26-bit Wiegand format

NC-OKP2N34

- 16K, 34-bit HAS format

Keyscan Contactless Mifare Smartcards & Readers

- K-SMART reader is 2 in 1 unit for mullion or single gang plate installation
- K-SECURE smartcard credentials work with Keyscan's K-SMART smart card reader
- Uses industry-proven nonproprietary MIFARE smartcard technology
- US Government option available for FIPS 201 & TWIC compatible transparent reader

CQ-KSMART (K-SMART)

CQ-KSECURE1K (K-SECURE 1K)

CQ-KSECURE4K (K-SECURE 4K)

Smart Readers & Credentials

SCHLAGE
Ingersoll Rand Security Technologies

Multi-Technology Readers

- Reads both 125 kHz prox & 13.56 MHz smart cards
- Compatible with many brands
- Mullion, Wall Mount, Mid-Range and Mid Range with Keypad
- Protect your customer's investment with flexibility

6S-MT15 (SXF1500)

SCHLAGE
Ingersoll Rand Security Technologies

HandKey II Hand Geometry Reader

- Up to 259,072 individual users per reader
- Standalone, Weigand or network capable
- Availabe with all card technologies
- Indoor and outdoor versions

RW-HK2F3 (HK2F3)

suprema partnered with ENTERTECH SYSTEMS

BioStation T2

- Authentication: Finger/Card/PIN
- Max User: 200,000; Log Capacity: 1,000,000
- CPU: 667MHz RISC, 533MHz DSP
- LCD: 5" WVGA touchscreen; Card: 13.56MHz Mifare

BS-BST2MOC (BST2MOC)

suprema partnered with ENTERTECH SYSTEMS

BioEntry Plus

- Authentication: Finger/Card
- 2,000 Matches in 1 second (1:N)
- Max User: 5,000; Log Capacity: 50,000
- Card: 13.56MHz Mifare

BS-BEPMOC (BEPMOC)

suprema partnered with ENTERTECH SYSTEMS

BioEntry Plus

- Authentication: Finger/Card
- 2,000 Matches in 1 second (1:N)
- Max User: 5,000; Log Capacity: 50,000
- Card: 125KHz HID Prox

BS-BEPHOC (BEPHOC)

suprema partnered with ENTERTECH SYSTEMS

BioLite Net

- Authentication: Finger/Card/PIN
- 2,000 Matches in 1 second (1:N); Max User: 5,000
- Log Capacity: 50,000 (Net); CPU: 400MHz;
- IP65; Operating Temp: -4 F - 122° F (-20° C - 50° C)

BS-BLNOC (BLNOC)

suprema partnered with ENTERTECH SYSTEMS

BioLite Solo

- Authentication: Finger/stand alone reader/PIN
- 2,000 Matches in 1 second (1:N); Max User: 200
- Max User: 5,000 (Solo); CPU: 400MHz; LCD with back light
- IP65; Operating Temp: -4 F - 122° F (-20° C - 50° C)

BS-BLSOC (BLSOC)

Xpass

- Authentication: Card/13.56MHz Mifare
- Max User: 40,000; Log Capacity: 50,000
- CPU: 32-bit microprocessor; IP65
- Interfaces: RS485, RS232, Weigand, PoE

BS-XPME (XPME)

Xpass

- Authentication: Card/125KHz HID Prox
- Max User: 40,000; Log Capacity: 50,000
- CPU: 32-bit microprocessor; IP65
- Interfaces: RS485, RS232, Weigand, POE

BS-XPHE (XPHE)

BioStar SE

- Advanced template management
- Visual mapping, anti pass back, roll call
- Time and attendance, zone management
- Server matching, concurrent client PC's

BS-BSSE2 (BSSE2)

Secure I/O

- Single secure door controller
- Input: 4-CH, output: Form C relay 2-CH
- Host communication: RS485
- Display: 10 status LED; Power: 12VDC @300mA

BS-SIO2 (SIO2)

BioMini

- USB enrollment scanner
- Sensor: Optical; Resolution: 500DPI
- Sensing area: 16 x 18mm

BS-BIOMINI (BIOMINI)

BioStar ACM

- Third party access control integration software
- Advanced template management features
- Customizable Wiegand outputs/inputs up to 64 bit Wiegand
- Connect and configure up to 512 devices

BS-ACM2 (ACM2)

suprema partnered with ENTERTECH SYSTEMS

BioEntry W

- Outdoor Biometric Access Control
- 2,000 Matches in 1 second (1:N); Max Users: 5,000
- Log Capacity: 50,000 (Net); CPU: 400MHz
- IP65 (Outdoor) and PoE; Operating Temp: -4°F - 122°F (-20°C - 50°C)

BS-BEWHOC (BEWHOC)

SAFRAN Morpho bioscrypt®

NIST #1 Rated Fingerprint Technology

With Bioscrypt now part of Morpho, enjoy the power of Morpho biometrics combined with the practical features of Bioscrypt. Morpho Biometric technology manages more than 3 billion fingerprints worldwide, and is rated #1 by NIST. Morpho also offers readers that support FIPS 201 Standards.

MorphoAccess® SIGMA Series

- Compatible with existing Morpho & Bioscrypt installations
- Videophone, Fake finger/face detection, duress finger
- Up to 10K users with Prox, iClass, MiFare/DESFire, NFC options
- IP65 option for outdoor sheltered use

OM-MAS

MorphoAccess® VP Series - Dual Fingerprint+Finger Vein

- Up to 10K users Dual Fingerprint/ Finger Vein Recognition
- Interfaces: PoE on RJ45 & WiFi
- MiFare/DESfire options
- Unrivalled Accuracy, Security & Convenience

OM-MAVPBIO

Morpho 3D Face Reader™

- Real-time 3D imaging technology
- Hands-free access identifies <1 second
- Accurate even in poor lighting

OM-3DFACE

4G V-Flex Lite™

- IP65 for outdoor sheltered use
- Up to 5K users, Compatible with Secure Control for door/device admin.
- Prox (BV-4GFXLSP), iCLASS, MiFare/ DESFire (BV-4GFXLSO)

BV-4GFXLS

4G V-Station Lite™

- Integrated PIN pad and 3 navigation keys
- Up to 5K users, Compatible with Secure Control for door/device admin.
- Prox (BV-4GSTLP), iCLASS, MiFare/ DESFire (BV-4GSTLO)
- IP65 for outdoor sheltered use

BV-4GSTLS

4G Secure Control™ - Stand-Alone/Device Admin.

- Compatible with any 4G Lite reader

BV-4GSC

MorphoAccess® J-Series

- IP65 for outdoor sheltered use
- Up to 3K users with Stand-alone relay or Wiegand option
- WiFi (OM-JWIFI), MiFare/DESFire (OM-JDUAL)

OM-JBIO

Outdoor MorphoAccess® MA500+

- Field tested IP65 fully ruggedized OUTDOOR reader
- Up to 3K users, Upgrade to 50K users. Stand-alone relay or Wiegand option.
- MiFare/DESFire (OM-MA520+)

OM-OMA520+

4G V-Station™

- Up to 50K users
- PoE & optional WiFi
- Prox (BV-4GSTSP), iCLASS (BV-4GSTSH), MIFARE/DESFire (BV-4GSTSG). Outdoor option for Extreme conditions.

BV-4GSTS

HID Global HDP5000 Badge Printer

- Superior print quality, higher reliability and durability, greater security – your photo ID cards will have all these qualities when you print and encode them with the affordable and versatile HDP5000 card printer/encoder.

FX-89620 (089004)

HID Global DTC1250e ID Card Printer/Encoder

- The ideal card printing solution for small businesses, schools and governments, the FARGO® DTC1250e card printer/encoder is the fastest printer in its class, allowing you to produce 50% more visually-rich, full-color credentials in the same amount of time.
- Optional Wi-Fi® accessory is also available to help you print anytime, anywhere.

FX-50000 (050000)

HID Global DTC4250e ID Card Printer/Encoder

- Able to produce large quantities of extremely durable credentials both quickly and easily. The DTC4250e features a flexible and modular design that can be easily adapted whenever your organization grows or your printing needs change.

FX-52000 (052000)

HID Global DTC4500e ID Card Printer/Encoder

- Designed for medium to large sized organizations, schools and government institutions looking for reliable, long-term solutions. The DTC4500e is a professional grade card printer/encoder that withstands the daily demands of high-volume printing.

FX-55000 (055000)

HID Global C50 ID Card Printer and Bundle Options

- The FARGO® C50 card printer offers a simple and reliable solution – at a price everyone can afford. The plug and play C50 creates personalized IDs for membership and loyalty cards, casino employee IDs, or visitor badges for schools whenever and wherever you need them, in five minutes or less.

FX-51700 (051700)

FX-51701 (051701)

- Bundle

FX-51702 (051702)

- Bundle2

Ultra ELECTRONICS | iD
TRUSTED IDENTITY FOR A SAFER WORLD

UltraSecure OnSite System

- Encode, manage and number UltraSecre proximity cards on demand for customers. Eliminate long lead times on custom programmed proximity cards.
- Custom programming software allows secure management of multiple customer facilities. Can encode multiple bit formats and facility codes for compatibility with existing systems.
- Optional decoder allows software to correctly encode replacement cards

UE-RIOP1 (RIO-P1)

- Printer with fitted proximity encoder and programming software. Includes separate card decoder for reading existing customer card formats.

UE-RIOP2 (RIO-P2)

- Printer with fitted proximity encoder and software.

Rio Pro Professional Series Printers

- Designed for full system integration: prints highly visible and secure cards on demand. HoloKote™ technology prints a custom watermark on every card, increasing security and durability without extra cost
- USB and Ethernet connectivity as well as embedded ICC color profiles. Three-year Ultra Cover Plus warranty guarantees free manufacturer repair, and technical support.
- Complete badging system only available through ADI includes Rio Pro printer, color ribbon, Trust ID badging software, camera, cleaning kit, and 100 blank cards

UE-36520001 (3652-0001)

- Rio Pro badging system – single side printer

UE-36520021 (3652-0021)

- Rio Pro badging system – dual side printer

Prima 4 Professional Series Retransfer Printers

- Deliver enterprise-grade cards at high volumes through reverse-transfer printing technology. Options also include high capacity die film rolls and lamination unit.
- Three-year Ultra Cover Plus warranty guarantees free manufacturer repair, and technical support. Includes Premium version of TrustID badging software, exclusively available through ADI.

UE-PRIMA401T (PRIMA401)

- Prima 4 with TrustID – single side printer

UE-PRIMA402T (PRIMA402)

- Prima 4 with TrustID – dual side printer

Enduro+ Badging Series Printers

- Versatile and economical, provides a desktop badging solution with professional-grade security. Single or dual sided operation includes HoloKote™ security watermark technology, optional mag-stripe encoding, and Ethernet connectivity as well as a two-year depot warranty.
- Complete badging system only available through ADI includes Enduro+ printer, color ribbon, Trust ID badging software, camera, cleaning kit, and 100 blank cards

UE-36339001 (3633-9001)

- Enduro+ badging system – single side printer

UE-36339021 (3633-9021)

- Enduro+ badging system – dual side printer

Pronto Badging Series Printers

- On-demand card printing for smaller operations. Budget friendly and ideal for low volume use; includes HoloKote™ security watermark technology. Optional mag-stripe encoding. Standard two-year depot warranty included.
- Complete badging system only available through ADI includes Pronto printer, color ribbon, Trust ID badging software, camera, cleaning kit, and 100 blank cards

UE-36490001 (3649-0001)

- Pronto badging system – hand fed, single side printer

Trust ID Badging Software

- Trust ID badging software allows you to get the most out of your badging printer. Trust ID combines robust features with an intuitive interface for simple credential design and printing.
- Intuitive, drag and drop interface requires no prior knowledge in design or the creation of databases, which makes it ideal to create and print secure identification cards in significantly less time than traditional card software.
- Exclusively available through ADI

UE-TRUSTIDP (TrustID–Premium)

- TrustID Premium version badging software

Telephone Entry & Gate Controllers

Keri's Entraguard Telephone Entry Systems

KF-EGT250

- Entraguard Titanium, small size, 250 tenants, 4-line scrolling display

KF-EGS750

- Entraguard Silver, full-sized 750 tenants, 4-line scrolling display

KF-EGP5000

- Entraguard Platinum, 5000 tenants, large display scalable fonts

KF-EGSWUPP

- Entraguard Silver with Keri reader for walk-up dual-mode access

Single-Door Commercial Telephone Entry

- 125 directory codes via 2-line LCD display
- Supports up to 4 LN-AE100's on shared telephone line with "single location update"
- Keypad or touchtone telephone programming
- English, Spanish, French Canadian or Portuguese programming & voice greeting
- ADA compliant TTY Jack

LN-AE100 (ACP00937)

2-Door Commercial Telephone Entry

- 250 directory codes via 2-line LCD display
- Built-in radio receiver
- 500 transmitters via built-in radio receiver
- 500 entry codes via side lit keypads
- 2 control relays, optional slave keypad
- Keypad, telephone, browser programming
- Optional flush mount trim ring (LN-TR500)

LN-AE500 (ACP00899)

4-Door Commercial Telephone Entry

- 4-door/gate control for up to 10,000 users
- Expandable to control up to 256 doors/gates
- Programming via AccessBase2000 software or AXNET
- Up to 31 validation groups (security levels)
- Transmitter, proximity card/tag and keypad access support
- Compatible with LN-AE2000P and LN-AM3PLUS

LN-AE1000P (ACP00951)

4-Door Commercial Telephone Entry

- 4-door/gate control for up to 10,000 users
- Expandable to control up to 256 doors/gates
- Programming via AccessBase2000 software or AXNET
- Large display presents 24 names, selectable alphabetically by last name
- Up to 31 validation groups (security levels)
- Transmitter, proximity card/tag and keypad access support
- Compatible with LN-AE2000P and LN-AM3PLUS

LN-AE2000P (ACP00952)

Residential Swing Gate Operator

- Gate post mounted linear actuator design
- Built-in battery backup (Solar Power Optional)
- Operates single or dual swing gates up to 600 lbs., 16' each
- APeX controller with on-board MegaCode radio receiver
- UL325 Listed for Class I-IV applications

LN-LRA (LRA)

Linear®
Building On Innovation.

Residential Swing Gate Operator

- Adjustable stagger on Dual gate applications
- 115 V 1P, AC Supply or DC Solar, 16' - 600 lbs. Max. Gate Weight
- Full-Featured APeX Controller with On-Board Megacode
  Radio Receiver
- ETL Listed for UL325 (Class I-IV) Applications for Canada & US

LN-LRA2 (LRA2)

Mircom™

Slim Line Electronic Directory Lobby Panels

- Slim design
- 4 line by 20 character scrolling directory
- Backlit 16 digit keypad with dedicated call/navigation buttons
- Interface for TX3 card access systems

MI-TX32004U (TX3-200-4U)
- 200 name capacity

MI-TX310004U (TX3-1000-4U)
- 1000 name capacity

MI-TX32004U (TX3-2000-4U)
- 2000 name capacity

Electronic Directory Lobby Panels

- Large 8 line by 20 character scrolling directory
- Backlit 16-digit keypad with dedicated call/navigation buttons
- Card access interface
- USB connection for local programming

MI-TX32008U (TX3-200-8U)
- 200 name capacity

MI-TX310008U (TX3-1000-8U)
- 1000 name capacity

MI-TX320008U (TX3-2000-8U)
- 2000 name capacity

Paper Directory Telephone Access System

- 120 name capacity
- 4 line by 20 character back-lit LCD display
- Backlit 16 digit keypad with dedicated call/navigation buttons
- Built-in illuminated paper directory for 120 names
- Interface for TX3 card access system
- USB connection for local programming
- Built-in rain hood
- Provisions for postal lock and camera

MI-TX3120U (TX3-120U)

Telephone Entry No Phone Bill Kit

- NSL Starter Kit for 12 residents/ suites
- 4 line by 20 character backlit LCD display
- No monthly phone bill
- Built-in Call Waiting feature
- Interface for TX3 card access systems
- USB connection for local programming
- Consult factory for larger systems

MI-TX3NSL12K (TX3-NSL-12K)

Touch Screen Telephone Entry Systems

- 15" industrial grade touch screen display
- Constructed of heavy gauge stainless steel
- Provisions for camera and postal lock
- Voice or video based help menu for ease of use
- Quiet fanless operation
- Easily load media content via USB interface or remotely
- Up to 150 Watts of impressive stereo sound with built in speakers and digital amplifier
- Available in surface, flush or kiosk mount configurations

MI-TX3TOUCHS (TX3-TOUCH-S15)
- Surface mount

MI-TX3TOUCHF (TX3-TOUCH-F15)
- Flush mount

MI-TX3TOUCHK (TX3-TOUCH-K15)
- Kiosk mount

PACHCO
SINCE 1978

AeGIS 7000PLUS Series Multi-Tenant Systems

- Latest surface mount integrated technology circuit boards
- 150-250 tenants and 150-250 access codes
- Program via keypad with audio prompts
- 1x16 Electronic Liquid Crystal Display. Surface and Full Flush Mounts Available.

PI-7150P (7150P)
PI-7150FFP (7150FFP)
PI-7250P (7250P)
PI-7250FFP (7250FFP)

Quantum Commercial Multi-Tenant Systems

- IP WEB BROWSER PROGRAMMABLE
- For 100 to 600 tenants using existing or dedicated phone line
- 100-1000 access codes and 100-1000 cards
- Built-in proprietary 26 bit card reader
- 600 Event Buffer
- 1 x 16 electronic directory
- Up to 8 optional satellite reader, keypad or combo
- Time Zone, Holiday Time Zone, Auto Unlock Schedule
- Temporary codes and cards
- Unlock hold codes and cards
- Optional QWCM module needed for QC1 and
- QC1FF for web browser programming

  * Optional for QC1 and QC1FF

PI-QC1 (QC1)
PI-QC2IP (QC2IP)
PI-QC1FF (QC1FF)
PI-QC2IPFF (QC2IPFF)
PI-QC1IP (QC1IP)
PI-QC6IP (QC6IP)
PI-QC1IPFF (QC1IPFF)
PI-QC2IPFF (QC2IPFF)

AeGIS 9000PLUS Multi-Tenant Dedicated Phone Systems

- 600-2000 tenant capacity
- 2500-3500 Access Codes and Cards
- Remote dial up software programming
- 1200 Event Buffer
- 26-Bit Wiegand input
- Up to 32 Satellite keypad or card reader via RS-485
- Time Zones, Holiday Zones, Auto-unlock timer
- 2 x 16 Electronic Liquid

PI-9600CR25P (9600CR25P)
PI-9600CR25F (9600CR25FFP)
PI-92KCR35P (91KCR35P)
PI-92KCR35NC (91KCR35FFP)

Quantum Residential and Small Commercial Systems

- IP WEB BROWSER PROGRAMMABLE * Optional for QR5 and QR5FF
- Distinctive ringing, call waiting and automatic call forwarding
- Interface with existing analog dial-tone, no new line isnecessary
- 1 to 10 tenants. Automatic Call forwarding.
- Built-in 26 Bit Proprietary Card Reader
- 50-100 Access Codes and 100 cards. 600 Event Buffer *.
- Up to 8 optional satellite reader, keypad or combo
- 2 x 16 electronic directory *
- Time Zone, Holiday Time Zone, Auto Unlock Schedule *
- Temporary codes and cards *. Unlock hold codes and cards *.
- Not Applicable for QR4 and QR4FF

PI-QR5 (QR5)
PI-QR4 (QR4)
PI-QR5FF (QR5FF)
PI-QR4FF (QR4FF)
PI-QR5IP (QR5IP)
PI-QR5IPFFF (QR5IPFFFF)

VIKING

Hands-free Speaker Phone with Dialer

- Automatically dials up to five 20-digit numbers
- Phone line powered, handsfree operation
- Program remotely from a touch tone phone
- Extended temperature range: -15° F to 130° F
- Shown in optional surface mount box (VK-VE5X5)

VK-E30 (E-30)

ADA Compliant Emergency Phone

- Meets ADA requirements for emergency phones
- Phone line powered and no batteries required
- Built-in digital voice announcer
- Dials up to 5 emergency numbers
- Central Station Monitoring compatible

VK-E1600A (E-1600A)

Single Gang Entry Phones

- Front panel is the size of a single gang wall plate
- Available in 5 standard finishes
- Vandal and weather resistant
- Telephone line powered
- Double gang version also available (VK-E60)

VK-E40 (E-40-SS)

Hands-Free Entry Phone with Keypad

- Door and gate entry or apartment applications
- Vandal resistant stainless steel faceplate
- Telephone line powered
- Available with color video camera (VK-K17053)
- Enhanced Weather Protection (EWP) available
- Shown in optional surface mount box (VK-VE6X7)

VK-K17003 (E-1700-3)

Entry Phone Controller with Call Forwarding

- Allows single line phones to share a phone line with a Viking entry phone
- Built in five number dialer
- Detects busy or ring no answer and goes onto the next number
- House phones ring with C.O. line cadence or distinctive ring when the entry phone is calling
- Built in door strike relay with 1-2 digit commands

VK-C250 (C-250)

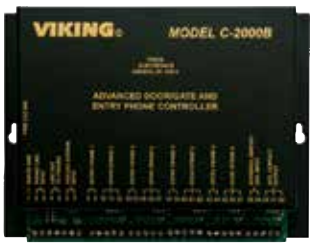

Advanced Door/Gate Entry Phone Controller

- Allows 1-4 entry phones to share a phone line
- Provide commercial or residential security via two-way hands-free communication at the door and gate
- Analog station dial-through mode
- Provides Caller ID and Call Waiting Caller ID
- Provides entry phone activated chimes and whole house paging when used with a VK-SLP4

VK-C2000B (C-2000B)

Voice Alarm Dialing from Two Inputs

- Stores up to seven 32-digit phone numbers per input (fourteen 32-digit numbers total)
- 2 minutes of record time (1 minute per input)
- Programmable message repeat counter and lap counter
- Two inputs programmable for normally open or normally closed and enabled or disabled
- Programmable ring delay for remote programming and alarm polling

VK-K202DVA (K-202-DNA)

Line Verification Panel with Key Switch

- Complies with ASME A17.1 Elevator Code. Immediately detects a cut or disconnected phone line.
- Allows Viking Model 1600A Series phones to daily test for dial tone
- Compatible with Viking Model LC-6 Six Port Line Concentrator
- Works with any analog device on any analog line

VK-LV1K (LV-1K)

Altronix

ADI Part #	Application	Description	Output Voltage	Current Maximum	Current/ Output	# of Outputs	Output Protection	Input Voltage	Fire Alarm Disconnect	Supervised	UL Listed	Warranty
AX-1012P16CB	Security/Access	Power Supply/ Charger	12VDC	10A	2.5A	16	PTC	115VAC		√		Lifetime
AX-1012PD16C	Access	Power Supply/ Charger	12VDC	10A	2.5A	16	PTC	115VAC		√	√	Lifetime
AX-1012ULACM	Access	Access Power Controller	12VDC	10A	3.5A	8	Fused	115VAC	√	√	√	Lifetime
AX-1012ULAMB	Access	Access Power Controller	12VDC	10A	2.5A	8	PTC	115VAC	√	√	√	Lifetime
AX-1012ULX16	Access	Power Supply/ Charger	12VDC	10A	3.5A	16	Fused	115VAC		√	√	Lifetime
AX-1012ULXP4	Access	Power Supply/ Charger	12VDC	10A	3.5A	4	Fused	115VAC		√	√	Lifetime
AX-1012ULXPD	Access	Power Supply/ Charger	12VDC	10A	3.5A	8	Fused	115VAC		√	√	Lifetime
AX-1012UXP4C	Access	Power Supply/ Charger	12VDC	10A	2.5A	4	PTC	115VAC		√	√	Lifetime
AX-1012UXP8C	Access	Power Supply/ Charger	12VDC	10A	2.5A	8	PTC	115VAC		√	√	Lifetime
AX-1024ACMCB	Access	Access Power Controller	24VDC	10A	2.5A	8	PTC	115VAC	√	√	√	Lifetime
AX-1024PD16C	Access/Fire	Power Supply/ Charger	24VDC	10A	2.5A	16	PTC	115VAC		√	√	Lifetime
AX-1024UACMJ	Access	Access Power Controller	24VDC	10A	3.5A	8	Fused	115VAC	√	√	√	Lifetime
AX-1024ULACM	Access	Access Power Controller	24VDC	10A	3.5A	8	Fused	115VAC	√	√	√	Lifetime
AX-1024ULPD4	Access/Fire	Power Supply/ Charger	24VDC	10A	3.5A	4	Fused	115VAC		√	√	Lifetime
AX-1024ULXCB	Access/Fire	Power Supply/ Charger	24VDC	10A	2.5A	8	PTC	115VAC		√	√	Lifetime
AX-1024ULXPD	Access/Fire	Power Supply/ Charger	24VDC	10A	3.5A	8	Fused	115VAC		√	√	Lifetime
AX-1024UPD4C	Access/Fire	Power Supply/ Charger	24VDC	10A	2.5A	4	PTC	115VAC		√	√	Lifetime
AX-1024UXPDR	Access/Fire	Power Supply/ Charger	24VDC	10A	3.5A	4	Fused	115VAC		√	√	Lifetime
AX-10PM12P16	Security/Access	Power Supply/ Charger	12VDC	10A	3.5A	16	Fused	115VAC		√		Lifetime
AX-10PM12P8C	Security/Access	Power Supply/ Charger	12VDC	10A	2.5A	8	PTC	115VAC		√		Lifetime
AX-10PM24P16	Security/Access	Power Supply/ Charger	24VDC	10A	3.5A	16	Fused	115VAC		√		Lifetime
AX-10PM24P8	Security/Access	Power Supply/ Charger	24VDC	10A	3.5A	8	Fused	115VAC		√		Lifetime
AX-10PM24P8B	Security/Access	Power Supply/ Charger	24VDC	10A	2.5A	8	PTC	115VAC		√		Lifetime
AX-300ULPD4	Security/ Access/Fire	Power Supply/ Charger	12/24VDC	2.5A	3.5A	4	Fused	115VAC		√	√	Lifetime
AX-300ULPD4C	Security/ Access/Fire	Power Supply/ Charger	12/24VDC	2.5A	2.5A	4	PTC	115VAC		√	√	Lifetime
AX-300ULPD8	Security/ Access/Fire	Power Supply/ Charger	12/24VDC	2.5A	3.5A	8	Fused	115VAC		√	√	Lifetime
AX-300ULPD8C	Security/ Access/Fire	Power Supply/ Charger	12/24VDC	2.5A	2.5A	8	PTC	115VAC		√	√	Lifetime
AX-300ULXP16	Security/ Access/Fire	Power Supply/ Charger	12/24VDC	2.5A	3.5A	16	Fused	115VAC		√	√	Lifetime
AX-300ULXPD8	Security/ Access/Fire	Power Supply/ Charger	12/24VDC	2.5A	3.5A	8	Fused	115VAC		√	√	Lifetime
AX-400ULACCB	Access	Access Power Controller	12/24VDC	4A/3A	2.5A	8	PTC	115VAC	√	√	√	Lifetime
AX-400ULACM	Access	Access Power Controller	12/24VDC	4A/3A	3.5A	8	Fused	115VAC	√	√	√	Lifetime
AX-400ULPD16	Security/ Access/Fire	Power Supply/ Charger	12/24VDC	4A/3A	3.5A	16	Fused	115VAC		√	√	Lifetime
AX-400ULPD4C	Security/ Access/Fire	Power Supply/ Charger	12/24VDC	4A/3A	2.5A	4	PTC	115VAC		√	√	Lifetime
AX-400ULPD8	Security/ Access/Fire	Power Supply/ Charger	12/24VDC	4A/3A	3.5A	8	Fused	115VAC		√	√	Lifetime
AX-400ULPD8C	Security/ Access/Fire	Power Supply/ Charger	12/24VDC	4A/3A	2.5A	8	PTC	115VAC		√	√	Lifetime
AX-400ULPDCB	Security/ Access/Fire	Power Supply/ Charger	12/24VDC	4A/3A	2.5A	16	PTC	115VAC		√	√	Lifetime
AX-400ULXPD4	Security/ Access/Fire	Power Supply/ Charger	12/24VDC	4A/3A	3.5A	4	Fused	115VAC		√	√	Lifetime
AX-400ULXPD8	Security/ Access/Fire	Power Supply/ Charger	12/24VDC	4A/3A	3.5A	8	Fused	115VAC		√	√	Lifetime

Altronix (Cont'd)

ADI Part #	Application	Description	Output Voltage	Current Maximum	Current/ Output	# of Outputs	Output Protection	Input Voltage	Fire Alarm Disconnect	Supervised	UL Listed	Warranty
AX-1012PD16C	Access	Power Supply/ Charger	12VDC	10A	2.5A	16	PTC	115VAC		√	√	Lifetime
AX-1012ULACM	Access	Access Power Controller	12VDC	10A	3.5A	8	Fused	115VAC	√	√	√	Lifetime
AX-1012ULAMB	Access	Access Power Controller	12VDC	10A	2.5A	8	PTC	115VAC	√	√	√	Lifetime
AX-1012ULX16	Access	Power Supply/ Charger	12VDC	10A	3.5A	16	Fused	115VAC		√	√	Lifetime
AX-1012ULXP4	Access	Power Supply/ Charger	12VDC	10A	3.5A	4	Fused	115VAC		√	√	Lifetime
AX-1012ULXPD	Access	Power Supply/ Charger	12VDC	10A	3.5A	8	Fused	115VAC		√	√	Lifetime
AX-1012UXP4C	Access	Power Supply/ Charger	12VDC	10A	2.5A	4	PTC	115VAC		√	√	Lifetime
AX-1012UXP8C	Access	Power Supply/ Charger	12VDC	10A	2.5A	8	PTC	115VAC		√	√	Lifetime
AX-1024ACMCB	Access	Access Power Controller	24VDC	10A	2.5A	8	PTC	115VAC	√	√	√	Lifetime
AX-1024PD16C	Access/Fire	Power Supply/ Charger	24VDC	10A	2.5A	16	PTC	115VAC		√	√	Lifetime
AX-1024UACMJ	Access	Access Power Controller	24VDC	10A	3.5A	8	Fused	115VAC	√	√	√	Lifetime
AX-1024ULACM	Access	Access Power Controller	24VDC	10A	3.5A	8	Fused	115VAC	√	√	√	Lifetime
AX-1024ULPD4	Access/Fire	Power Supply/ Charger	24VDC	10A	3.5A	4	Fused	115VAC		√	√	Lifetime
AX-1024ULXCB	Access/Fire	Power Supply/ Charger	24VDC	10A	2.5A	8	PTC	115VAC		√	√	Lifetime
AX-1024ULXPD	Access/Fire	Power Supply/ Charger	24VDC	10A	3.5A	8	Fused	115VAC		√	√	Lifetime
AX-1024UPD4C	Access/Fire	Power Supply/ Charger	24VDC	10A	2.5A	4	PTC	115VAC		√	√	Lifetime
AX-1024UXPDR	Access/Fire	Power Supply/ Charger	24VDC	10A	3.5A	4	Fused	115VAC		√	√	Lifetime
AX-10PM12P16	Security/Access	Power Supply/ Charger	12VDC	10A	3.5A	16	Fused	115VAC		√		Lifetime
AX-10PM12P8C	Security/Access	Power Supply/ Charger	12VDC	10A	2.5A	8	PTC	115VAC		√		Lifetime
AX-10PM24P16	Security/Access	Power Supply/ Charger	24VDC	10A	3.5A	16	Fused	115VAC		√		Lifetime
AX-10PM24P8	Security/Access	Power Supply/ Charger	24VDC	10A	3.5A	8	Fused	115VAC		√		Lifetime
AX-10PM24P8B	Security/Access	Power Supply/ Charger	24VDC	10A	2.5A	8	PTC	115VAC		√		Lifetime
AX-300ULPD4	Security/ Access/Fire	Power Supply/ Charger	12/24VDC	2.5A	3.5A	4	Fused	115VAC		√	√	Lifetime
AX-300ULPD4C	Security/ Access/Fire	Power Supply/ Charger	12/24VDC	2.5A	2.5A	4	PTC	115VAC		√	√	Lifetime
AX-300ULPD8	Security/ Access/Fire	Power Supply/ Charger	12/24VDC	2.5A	3.5A	8	Fused	115VAC		√	√	Lifetime
AX-300ULPD8C	Security/ Access/Fire	Power Supply/ Charger	12/24VDC	2.5A	2.5A	8	PTC	115VAC		√	√	Lifetime
AX-300ULXP16	Security/ Access/Fire	Power Supply/ Charger	12/24VDC	2.5A	3.5A	16	Fused	115VAC		√	√	Lifetime
AX-300ULXPD8	Security Access/Fire	Power Supply/ Charger	12/24VDC	2.5A	3.5A	8	Fused	115VAC		√	√	Lifetime
AX-400ULACCB	Access	Access Power Controller	12/24VDC	4A/3A	2.5A	8	PTC	115VAC	√	√	√	Lifetime
AX-400ULACM	Access	Access Power Controller	12/24VDC	4A/3A	3.5A	8	Fused	115VAC	√	√	√	Lifetime
AX-400ULPD16	Security/ Access/Fire	Power Supply/ Charger	12/24VDC	4A/3A	3.5A	16	Fused	115VAC		√	√	Lifetime
AX-400ULPD4C	Security/ Access/Fire	Power Supply/ Charger	12/24VDC	4A/3A	2.5A	4	PTC	115VAC		√	√	Lifetime
AX-400ULPD8	Security/ Access/Fire	Power Supply/ Charger	12/24VDC	4A/3A	3.5A	8	Fused	115VAC		√	√	Lifetime
AX-400ULPD8C	Security/ Access/Fire	Power Supply/ Charger	12/24VDC	4A/3A	2.5A	8	PTC	115VAC		√	√	Lifetime
AX-400ULPDCB	Security/ Access/Fire	Power Supply/ Charger	12/24VDC	4A/3A	2.5A	16	PTC	115VAC		√	√	Lifetime
AX-400ULXPD4	Security/ Access/Fire	Power Supply/ Charger	12/24VDC	4A/3A	3.5A	4	Fused	115VAC		√	√	Lifetime
AX-400ULXPD8	Security/ Access/Fire	Power Supply/ Charger	12/24VDC	4A/3A	3.5A	8	Fused	115VAC		√	√	Lifetime
AX-400ULXPD8	Security/ Access/Fire	Power Supply/ Charger	12/24VDC	4A/3A	3.5A	8	Fused	115VAC		√	√	Lifetime

Altronix (Cont'd)

ADI Part #	Application	Description	Output Voltage	Current Maximum	Current/ Output	# of Outputs	Output Protection	Input Voltage	Fire Alarm Disconnect	Supervised	UL Listed	Warranty
AX-600UL16CB	Security/ Access/Fire	Power Supply/ Charger	12/24VDC	6A	2.5A	16	PTC	115VAC		√	√	Lifetime
AX-600ULACM	Access	Access Power Controller	12/24VDC	6A	3.5A	8	Fused	115VAC	√	√	√	Lifetime
AX-600ULACMB	Access	Access Power Controller	12/24VDC	6A	2.5A	8	PTC	115VAC	√	√	√	Lifetime
AX-600ULPD4	Security/ Access/Fire	Power Supply/ Charger	12/24VDC	6A	3.5A	4	Fused	115VAC		√	√	Lifetime
AX-600ULPD4C	Security/ Access/Fire	Power Supply/ Charger	12/24VDC	6A	2.5A	4	PTC	115VAC		√	√	Lifetime
AX-600ULPD8	Security/ Access/Fire	Power Supply/ Charger	12/24VDC	6A	3.5A	8	Fused	115VAC		√	√	Lifetime
AX-600ULPD8	Access	Power Supply/ Charger	12/24VDC	6A	3.5A	8	Fused	115VAC		√	√	Lifetime
AX-600ULPD8C	Security/ Access/Fire	Power Supply/ Charger	12/24VDC	6A	2.5A	8	PTC	115VAC		√	√	Lifetime
AX-600ULPD8R	Security/ Access/Fire	Power Supply/ Charger	12/24VDC	6A	3.5A	8	Fused	115VAC		√	√	Lifetime
AX-600ULXP4C	Security/ Access/Fire	Power Supply/ Charger	12/24VDC	6A	2.5A	4	PTC	115VAC		√	√	Lifetime
AX-600ULXPD1	Security/ Access/Fire	Power Supply/ Charger	12/24VDC	6A	3.5A	16	Fused	115VAC		√	√	Lifetime
AX-600ULXPD4	Security/ Access/Fire	Power Supply/ Charger	12/24VDC	6A	3.5A	4	Fused	115VAC		√	√	Lifetime
AX-600UXP16R	Security/ Access/Fire	Power Supply/ Charger	12/24VDC	6A	3.5A	16	Fused	115VAC		√	√	Lifetime
AX-600XPD8CB	Security/ Access/Fire	Power Supply/ Charger	12/24VDC	6A	2.5A	8	PTC	115VAC		√	√	Lifetime
AX-ACM4	Access	Access Power Control Board	Same as Input	10A	3.5A	4	Fused	12/24 VDC/VAC	√		√	Lifetime
AX-ACM4CB	Access	Access Power Control Board	Same as Input	10A	2.5A	4	PTC	12/24 VDC/VAC	√		√	Lifetime
AX-ACM8	Access	Access Power Control Board	Same as Input	10A	3.5A	8	Fused	12/24 VDC/VAC	√		√	Lifetime
AX-ACM8CB	Access	Access Power Control Board	Same as Input	10A	2.5A	8	PTC	12/24 VDC/VAC	√		√	Lifetime
AX-AL1012ULM	Access	Power Supply/ Charger	12VDC	10A	2A	5	PTC	115VAC	√	√	√	Lifetime
AX-AL1012ULX	Access	Power Supply/ Charger	12VDC	10A		1	Bat PTC/ Electronic	115VAC		√	√	Lifetime
AX-AL1024ULM	Access/Fire	Power Supply/ Charger	24VDC	10A	2A	5	PTC	115VAC	√	√	√	Lifetime
AX-AL1024ULX	Access/Fire	Power Supply/ Charger	24VDC	10A		1	Bat Fuse/ Electronic	115VAC		√	√	Lifetime
AX-AL1024X16	Access/Fire	Power Supply/ Charger	24VDC	10A	3.5A	16	Fused	115VAC		√	√	Lifetime
AX-AL175UL	Security/ Access/ Fire	Power Supply/ Charger	12/24VDC	1.75A	2A	2	PTC	115VAC		√	√	Lifetime
AX-AL175ULX	Access	Power Supply/ Charger	12/24VDC	1.75A	2A	2	PTC	115VAC		√	√	Lifetime
AX-AL201UL	Access	Power Supply/ Charger	12VDC	1.75A	2A	1	PTC	115VAC		√	√	Lifetime
AX-AL300ULM	Access	Power Supply/ Charger	12/24VDC	2.5A	2A	5	PTC	115VAC	√	√	√	Lifetime
AX-AL300ULX	Security/ Access/Fire	Power Supply/ Charger	12/24VDC	2.5A		1	Bat PTC/ Electronic	115VAC		√	√	Lifetime
AX-AL300ULXD	Security/ Access/Fire	Power Supply/ Charger	12/24VDC	2.5A		1	Bat PTC/ Electronic	115VAC		√	√	Lifetime
AX-AL400LPD4	Security/ Access/Fire	Power Supply/ Charger	12/24VDC	4A/3A	3.5A	4	Fused	115VAC		√	√	Lifetime
AX-AL400UL	Security Access/Fire	Power Supply/ Charger	12/24VDC	4A/3A		1	PTC	115VAC		√	√	Lifetime
AX-AL400UL3	Security/ Access/Fire	Power Supply/ Charger	5/12/24VDC	1.75A/1.75A/1.5A		3	PTC	115VAC		√	√	Lifetime
AX-AL400UL3X	Security/ Access/Fire	Power Supply/ Charger	5/12/24VDC	1.75A/1.75A/1.5A		3	PTC	115VAC		√	√	Lifetime
AX-AL400ULM	Access	Power Supply/ Charger	12/24VDC	4A/3A	2A	5	PTC	115VAC	√	√	√	Lifetime
AX-AL400ULX	Security/ Access/Fire	Power Supply/ Charger	12/24VDC	4A/3A		1	Bat PTC/ Electronic	115VAC		√	√	Lifetime
AX-AL400ULXB	Security/ Access/Fire	Power Supply/ Charger	12/24VDC	4A/3A		1	Bat PTC/ Electronic	115VAC		√	√	Lifetime
AX-AL600UL3	Security/ Access/Fire	Power Supply/ Charger	5/12/24VDC	1.75A/1.75A/3A		3	PTC	115VAC		√	√	Lifetime
AX-AL600UL3X	Security/ Access/Fire	Power Supply/ Charger	5/12/24VDC	1.75A/1.75A/3A		3	PTC	115VAC		√	√	Lifetime

Access Control Power

Altronix (Cont'd)

ADI Part #	Application	Description	Output Voltage	Current Maximum	Current/ Output	# of Outputs	Output Protection	Input Voltage	Fire Alarm Disconnect	Supervised	UL Listed	Warranty
AX-AL600ULM	Access	Power Supply/ Charger	12/24VDC	6A	2A	5	PTC	115VAC	√	√	√	Lifetime
AX-AL600ULX	Security/ Access/Fire	Power Supply	12/24VDC	6A		1	Bat PTC/ Electronic	115VAC		√	√	Lifetime
AX-MAX11	Access	Access Power Controller	12/24VDC	2.7A/3.5A	3.5A	16	Fused	115VAC	√	√	√	Lifetime
AX-MAX11D	Access	Access Power Controller	12/24VDC	2.7A/3.5A	2.5A	16	PTC	115VAC	√	√	√	Lifetime
AX-MAX11E	Security/ Access/Fire	Power Supply/ Charger	12/24VDC	2.7A/3.5A		2	Bat PTC/ Electronic	115VAC		√	√	Lifetime
AX-MAX13E	Security/ Access/Fire	Power Supply/ Charger	12/24VDC	10A/9A		2	Bat PTC/ Electronic	115VAC		√	√	Lifetime
AX-MAX1R	Access	Rack Access Power Controller	12/24VDC	3A/4A	2A	16	Fused	115VAC	√	√		Lifetime
AX-MAX1RD	Access	Access Power Controller	12/24VDC	3A/4A	2A	16	PTC	115VAC	√	√		Lifetime
AX-MAX1RH	Access	Access Power Controller	12/24VDC	3A/4A	2A	8	Fused	115VAC	√	√		Lifetime
AX-MAX3	Access	Access Power Controller	12/24VDC	5A/5.4A	3.5A	16	Fused	115VAC	√	√	√	Lifetime
AX-MAX33	Access	Access Power Controller	12/24VDC	10A/11.4A	3.5A	16	Fused	115VAC	√	√	√	Lifetime
AX-MAX33D	Access	Access Power Controller	12/24VDC	10A/11.4A	2.5A	16	PTC	115VAC	√	√	√	Lifetime
AX-MAX33E	Security/ Access/Fire	Power Supply/ Charger	12/24VDC	12A	6A	2	Bat PTC/ Electronic	115VAC		√	√	Lifetime
AX-MAX33R	Access	Access Power Controller	12/24VDC	12A	2A	16	Fused	115VAC	√	√		Lifetime
AX-MAX33RD	Access	Access Power Controller	12/24VDC	12A	2A	16	PTC	115VAC	√	√		Lifetime
AX-MAX35E	Security/ Access/Fire	Power Supply/ Charger	12/24VDC	10A/6A	10A/6A	2	Fuse/ Electronic	115VAC		√	√	Lifetime
AX-MAX37E	Security/ Access/Fire	Power Supply/ Charger	12/24VDC	6A/10A	6A/10A	2	Fuse/ Electronic	115VAC		√	√	Lifetime
AX-MAX3D	Access	Access Power Controller	12/24VDC	5A/5.4A	2.5A	16	PTC	115VAC	√	√	√	Lifetime
AX-MAX3R	Access	Access Power Controller	12/24VDC	6A	2A	16	Fused	115VAC	√	√		Lifetime
AX-MAX3RD	Access	Access Power Controller	12/24VDC	6A	2A	16	PTC	115VAC	√	√		Lifetime
AX-MAX3RH	Access	Access Power Controller	12/24VDC	6A	2A	8	Fused	115VAC	√	√		Lifetime
AX-MAX3RHD	Access	Access Power Controller	12/24VDC	6A	2A	8	PTC	115VAC	√	√		Lifetime
AX-MAX5	Access	Access Power Controller	12VDC	9A	3.5A	16	Fused	115VAC	√	√	√	Lifetime
AX-MAX55	Access	Access Power Controller	12VDC x 2	9.5A	3.5A	16	Fused	115VAC	√	√	√	Lifetime
AX-MAX55E	Security/ Access/Fire	Power Supply/ Charger	12VDC x 2	20A	10A	2	Fuse/ Electronic	115VAC		√	√	Lifetime
AX-MAX5D	Access	Access Power Controller	12VDC	9A	2A	16	PTC	115VAC	√	√	√	Lifetime
AX-MAX7	Access	Access Power Controller	24VDC	9.4A	3.5A	16	Fused	115VAC	√	√	√	Lifetime
AX-MAX75	Access	Access Power Controller	12/24VDC	9.5A/9.7A	3.5A	16	Fused	115VAC	√	√	√	Lifetime
AX-MAX75D	Access	Access Power Controller	12/24VDC	9.5A/9.7A	2.5A	16	PTC	115VAC	√	√	√	Lifetime
AX-MAX75E	Security/ Access/Fire	Power Supply/ Charger	12/24VDC	20A	10A	2	Fuse/ Electronic	115VAC		√	√	Lifetime
AX-MAX77	Access	Access Power Controller	24VDC x 2	19.4A	3.5A	16	Fused	115VAC	√	√	√	Lifetime
AX-MAX77D	Access	Access Power Controller	24VDC x 2	19.4A	2.5A	16	PTC	115VAC	√	√	√	Lifetime
AX-MAX77E	Security/ Access/Fire	Power Supply/ Charger	24VDC x 2	20A	10A	2	Fuse/ Electronic	115VAC		√	√	Lifetime
AX-MAX7D	Access	Access Power Controller	24VDC	9.4A	2.5A	16	PTC	115VAC	√	√	√	Lifetime
AX-R1224D16C	Security/ Access/Fire	Rack Dual Voltage Supply	12/24VDC	18A	2.5A	16	PTC	115VAC		√		Lifetime
AX-SMP1012P4	General Purpose	Power Supply/ Charger	12VDC	10A	3.5A	4	Fused	115VAC		√		Lifetime
AX-SMP10PM12	General Purpose	Power Supply/ Charger	12VDC	10A	3.5A	8	Fused	115VAC		√		Lifetime
AX-SMP10PM24	General Purpose	Power Supply/ Charger	24VDC	10A	2.5A	16	PTC	115VAC		√		Lifetime

Altronix (Cont'd)

ADI Part #	Application	Description	Output Voltage	Current Maximum	Current/ Output	# of Outputs	Output Protection	Input Voltage	Fire Alarm Disconnect	Supervised	UL Listed	Warranty
AX-SMP10PMC1	General Purpose	Power Supply/ Charger	12VDC	10A		1	Fuse	115VAC		√		Lifetime
AX-SMP10PMC2	General Purpose	Power Supply/ Charger	24VDC	10A		1	Fuse	115VAC		√		Lifetime
AX-SMP3PMP16	General Purpose	Power Supply/ Charger	12/24VDC	2.5A	3.5A	16	Fused	115VAC		√		Lifetime
AX-SMP3PMP4	General Purpose	Power Supply/ Charger	12/24VDC	2.5A	3.5A	4	Fused	115VAC		√		Lifetime
AX-SMP3PMP4C	General Purpose	Power Supply/ Charger	12/24VDC	2.5A	2.5A	4	PTC	115VAC		√		Lifetime
AX-SMP3PMP8	General Purpose	Power Supply/ Charger	12/24VDC	2.5A	3.5A	8	Fused	115VAC		√		Lifetime
AX-SMP3PMP8C	General Purpose	Power Supply/ Charger	12/24VDC	2.5A	2.5A	8	PTC	115VAC		√		Lifetime
AX-SMP5PMCTX	General Purpose	Power Supply/ Charger	12/24VDC	4A		1	Fuse	115VAC		√		Lifetime
AX-SMP5PMP16	General Purpose	Power Supply/ Charger	12/24VDC	4A	3.5A	16	Fused	115VAC		√		Lifetime
AX-SMP5PMP4	General Purpose	Power Supply/ Charger	12/24VDC	4A	3.5A	4	Fused	115VAC		√		Lifetime
AX-SMP5PMP4C	General Purpose	Power Supply/ Charger	12/24VDC	4A	2.5A	4	PTC	115VAC		√		Lifetime
AX-SMP5PMP8	General Purpose	Power Supply/ Charger	12/24VDC	4A	3.5A	8	Fused	115VAC		√		Lifetime
AX-SMP5PMP8C	General Purpose	Power Supply/ Charger	12/24VDC	4A	2.5A	8	PTC	115VAC		√		Lifetime
AX-SMP7PMP16	General Purpose	Power Supply/ Charger	12/24VDC	6A	3.5A	16	Fused	115VAC		√		Lifetime
AX-SMP7PMP4	General Purpose	Power Supply/ Charger	12/24VDC	6A	3.5A	4	Fused	115VAC		√		Lifetime
AX-SMP7PMP4C	General Purpose	Power Supply/ Charger	12/24VDC	6A	2.5A	4	PTC	115VAC		√		Lifetime
AX-SMP7PMP8	General Purpose	Power Supply/ Charger	12/24VDC	6A	3.5A	8	Fused	115VAC		√		Lifetime
AX-SMP7PMP8C	General Purpose	Power Supply/ Charger	12/24VDC	6A	2.5A	8	PTC	115VAC		√		Lifetime
AX-STRIKEIT1	Access	Panic Device Power Controller	24VDC	16A/300ms		2	PTC	115VAC	√		√	Lifetime
AX-STRIKEIT2	Access	Panic Device Power Controller	24VDC	16A/300ms		1	PTC	115VAC	√		√	Lifetime
AX-VERT33D	General Purpose	Rack Mount Power Supply	12VDC	8A	2.5A	16	PTC	115VAC				Lifetime
AX-VERT33TD	General Purpose	Rack Mount Power Supply	12VDC	16A	2.5A	16	PTC	115VAC				Lifetime
AX-VERT3D	General Purpose	Rack Mount Power Supply	12VDC	8A	2.5A	8	PTC	115VAC				Lifetime
AX-VERT63D	General Purpose	Rack Mount Power Supply	24VDC	8A	2.5A	16	PTC	115VAC				Lifetime
AX-VERT63TD	General Purpose	Rack Mount Power Supply	24VDC	16A	2.5A	16	PTC	115VAC				Lifetime
AX-VERT6D	General Purpose	Rack Mount Power Supply	24VDC	8A	2.5A	8	PTC	115VAC				Lifetime

Honeywell

ADI Part #	Application	Description	Output Voltage	Current Maximum	Current/ Output	# of Outputs	Output Protection	Input Voltage	Fire Alarm Disconnect	Supervised	UL Listed	Warranty
OH-400ACM4	Access	Power Supply/ Charger	12/24DC	4.0A	2.5A	4	PTC	120VAC, 60HZ			√	Lifetime
OH-HP600ULA8	Access	Power Supply/ Charger	12/24DC	6.0A	2.5A	8	PTC	120VAC, 60HZ			√	Lifetime
OH-HP300ULM	Access	Power Supply/ Charger	12/24DC	2.5A	2.5A	6	PTC	120VAC, 60HZ			√	Lifetime
OH-HP400ULM	Access	Power Supply/ Charger	12/24DC	4.0A	2.5A	6	PTC	120VAC, 60HZ			√	Lifetime
OH-HP600ULM	Access	ower Supply/ Charger	12/24DC	6.0A	2.5A	6	PTC	120VAC, 60HZ			√	Lifetime

LifeSafety Power

ADI Part #	Application	Description	Output Voltage	Current Maximum	Current/ Output	# of Outputs	Output Protection	Input Voltage	Fire Alarm Disconnect	Supervised	UL Listed	Warranty
J7-KS75-D8E2	Access/ Security/Fire/ CCTV	Access AC&DC Power	16VAC, 12/24VDC	200VA, 6A/3A	3A	8	Fused	120/230VAC	√	√	√	Lifetime
J7-KS75-D8PE2	Access/ Security/Fire/ CCTV	Access AC&DC Power	16VAC, 12/24VDC	200VA, 6A/3A	2.5A	8	PTC	120/230VAC	√	√	√	Lifetime
J7-KS150-D8E2	Access/ Security/Fire/ CCTV	Access AC&DC Power	16VAC, 12/24VDC	200VA, 12A/6A	3A	8	Fused	120/230VAC	√	√	√	Lifetime
J7-KS150-D8PE2	Access/ Security/Fire/ CCTV	Access AC&DC Power	16VAC, 12/24VDC	200VA, 12A/6A	2.5A	8	PTC	120/230VAC	√	√	√	Lifetime
J7-KS250-D8E2	Access/ Security/Fire/ CCTV	Access AC&DC Power	16VAC, 12/24VDC	200VA, 20A/10A	3A	8	Fused	120/230VAC	√	√	√	Lifetime
J7-KS250-D8PE2	Access/ Security/Fire/ CCTV	Access AC&DC Power	16VAC, 12/24VDC	200VA, 20A/10A	2.5A	8	PTC	120/230VAC	√	√	√	Lifetime
J7-ISCAN8S	Access/ Security/Fire/ CCTV	Remote Managed Power	12/24VDC	12A/6A	3A	8 managed	Fused	120/230VAC	√	√	√	Lifetime
J7-ISCAN8SP	Access/ Security/Fire/ CCTV	Remote Managed Power	12/24VDC	12A/6A	2.5A	8 managed	PTC	120/230VAC	√	√	√	Lifetime
J7-ISCAN16S	Access/ Security/Fire/ CCTV	Remote Managed Power	12/24VDC	12A/6A	3A	16 managed	Fused	120/230VAC	√	√	√	Lifetime
J7-ISCAN16SP	Access/ Security/Fire/ CCTV	Remote Managed Power	12/24VDC	12A/6A	2.5A	16 managed	PTC	120/230VAC	√	√	√	Lifetime
J7-ISCAN8D	Access/ Security/Fire/ CCTV	Remote Managed Power	12&24VDC	12V/12A & 24V/6A	3A	8 managed	Fused	120/230VAC	√	√	√	Lifetime
J7-ISCAN8DP	Access/ Security/Fire/ CCTV	Remote Managed Power	12&24VDC	12V/12A & 24V/6A	2.5A	8 managed	PTC	120/230VAC	√	√	√	Lifetime
J7-ISCAN8B	Access/ Security/Fire/ CCTV	Remote Managed Power	12&24VDC	12V/4A & 24V/4A	3A	8 managed	Fused	120/230VAC	√	√	√	Lifetime
J7-ISCAN8BP	Access/ Security/Fire/ CCTV	Remote Managed Power	12&24VDC	12V/4A & 24V/4A	2.5A	8 managed	PTC	120/230VAC	√	√	√	Lifetime
J7-ISCAN16B	Access/ Security/Fire/ CCTV	Remote Managed Power	12&24VDC	12V/4A & 24V/8A	3A	16 managed	Fused	120/230VAC	√	√	√	Lifetime
J7-ISCAN16BP	Access/ Security/Fire/ CCTV	Remote Managed Power	12&24VDC	12V/4A & 24V/8A	2.5A	16 managed	PTC	120/230VAC	√	√	√	Lifetime
J7-ISCAN16D	Access/ Security/Fire/ CCTV	Remote Managed Power	12&24VDC	12V/12A & 24V/6A	3A	16 managed	Fused	120/230VAC	√	√	√	Lifetime
J7-ISCAN16DP	Access/ Security/Fire/ CCTV	Remote Managed Power	12&24VDC	12V/12A & 24V/6A	2.5A	16 managed	PTC	120/230VAC	√	√	√	Lifetime
J7-FPO75-E1	Access/ Security/Fire/ CCTV	Access or General Purpose	12/24VDC	6A/3A	6A/3A	2	Fused/ Electronic	120/230VAC	√	√	√	Lifetime
J7-FPO75-D8E1	Access/ Security/Fire/ CCTV	Access or General Purpose	12/24VDC	6A/3A	3A	8	Fused	120/230VAC	√	√	√	Lifetime
J7-FPO75-D8PE1	Access/ Security/Fire/ CCTV	Access or General Purpose	12/24VDC	6A/3A	2.5A	8	PTC	120/230VAC	√	√	√	Lifetime
J7-FPO75-C4E1	Access/ Security/Fire/ CCTV	Access or General Purpose	12/24VDC	6A/3A	3A	4	Fused	120/230VAC	√	√	√	Lifetime
J7-FPO75-C4PE1	Access/ Security/Fire/ CCTV	Access or General Purpose	12/24VDC	6A/3A	2.5A	4	PTC	120/230VAC	√	√	√	Lifetime
J7-FPO75-C8E1	Access/ Security/Fire/ CCTV	Access or General Purpose	12/24VDC	6A/3A	3A	8	Fused	120/230VAC	√	√	√	Lifetime
J7-FPO75-C8PE1	Access/ Security/Fire/ CCTV	Access or General Purpose	12/24VDC	6A/3A	2.5A	8	PTC	120/230VAC	√	√	√	Lifetime
J7-FPO75-J7-F8E1	Access/ Security/Fire/ CCTV	Access or General Purpose	12/24VDC	6A/3A	3A	8	Fused	120/230VAC	√	√	√	Lifetime

LifeSafety Power (Cont'd)

ADI Part #	Application	Description	Output Voltage	Current Maximum	Current/ Output	# of Outputs	Output Protection	Input Voltage	Fire Alarm Disconnect	Supervised	UL Listed	Warranty
J7-FPO150-J7-F8E1	Access/ Security/Fire/ CCTV	Access or General Purpose	12/24VDC	12A/6A	3A	8	Fused	120/230VAC	√	√	√	Lifetime
J7-FPO150-J7-F8PE1	Access/ Security/Fire/ CCTV	Access or General Purpose	12/24VDC	12A/6A	2.5A	8	PTC	120/230VAC	√	√	√	Lifetime
J7-FPO150-2D8E1	Access/ Security/Fire/ CCTV	Access or General Purpose	12/24VDC	12A/6A	3A	16	Fused	120/230VAC	√	√	√	Lifetime
J7-FPO150-2D8PE1	Access/ Security/Fire/ CCTV	Access or General Purpose	12/24VDC	12A/6A	2.5A	16	PTC	120/230VAC	√	√	√	Lifetime
J7-FPO150-2C8E2	Access/ Security/Fire/ CCTV	Access or General Purpose	12/24VDC	12A/6A	3A	16	Fused	120/230VAC	√	√	√	Lifetime
J7-FPO150-2C8PE2	Access/ Security/Fire/ CCTV	Access or General Purpose	12/24VDC	12A/6A	2.5A	16	PTC	120/230VAC	√	√	√	Lifetime
J7-FPO150-2J7-F8E1	Access/ Security/Fire/ CCTV	Access or General Purpose	12/24VDC	12A/6A	3A	16	Fused	120/230VAC	√	√	√	Lifetime
J7-FPO150-2J7-F8PE1	Access/ Security/Fire/ CCTV	Access or General Purpose	12/24VDC	12A/6A	2.5A	16	PTC	120/230VAC	√	√	√	Lifetime
J7-FPO250-E1	Access/ Security/Fire/ CCTV	Access or General Purpose	12/24VDC	20A/10A	20A/10A	2	Fused/ Electronic	120/230VAC	√	√	√	Lifetime
J7-FPO250-D8E1	Access/ Security/Fire/ CCTV	Access or General Purpose	12/24VDC	20A/10A	3A	8	Fused	120/230VAC	√	√	√	Lifetime
J7-FPO250-D8PE1	Access/ Security/Fire/ CCTV	Access or General Purpose	12/24VDC	20A/10A	2.5A	8	PTC	120/230VAC	√	√	√	Lifetime
J7-FPO250-C8E1	Access/ Security/Fire/ CCTV	Access or General Purpose	12/24VDC	20A/10A	3A	8	Fused	120/230VAC	√	√	√	Lifetime
J7-FPO250-C8PE1	Access/ Security/Fire/ CCTV	Access or General Purpose	12/24VDC	20A/10A	2.5A	8	PTC	120/230VAC	√	√	√	Lifetime
J7-FPO250-J7-F8E1	Access/ Security/Fire/ CCTV	Access or General Purpose	12/24VDC	20A/10A	3A	8	Fused	120/230VAC	√	√	√	Lifetime
J7-FPO250-J7-F8PE1	Access/ Security/Fire/ CCTV	Access or General Purpose	12/24VDC	20A/10A	2.5A	8	PTC	120/230VAC	√	√	√	Lifetime
J7-FPO250-2D8E1	Access/ Security/Fire/ CCTV	Access or General Purpose	12/24VDC	20A/10A	3A	16	Fused	120/230VAC	√	√	√	Lifetime
J7-FPO250-2D8PE1	Access/ Security/Fire/ CCTV	Access or General Purpose	12/24VDC	20A/10A	2.5A	16	PTC	120/230VAC	√	√	√	Lifetime
J7-FPO250-2C8E2	Access/ Security/Fire/ CCTV	Access or General Purpose	12/24VDC	20A/10A	3A	16	Fused	120/230VAC	√	√	√	Lifetime
J7-FPO250-2C8PE2	Access/ Security/Fire/ CCTV	Access or General Purpose	12/24VDC	20A/10A	2.5A	16	PTC	120/230VAC	√	√	√	Lifetime
J7-FPO250-2J7-F8E1	Access/ Security/Fire/ CCTV	Access or General Purpose	12/24VDC	20A/10A	3A	16	Fused	120/230VAC	√	√	√	Lifetime
J7-FPO250-2J7-F8PE1	Access/ Security/Fire/ CCTV	Access or General Purpose	12/24VDC	20A/10A	2.5A	16	PTC	120/230VAC	√	√	√	Lifetime
J7-FPO75-B100E1	Access/ Security/Fire/ CCTV	Access or General Purpose	12&24VDC	12V/4A & 24V/2A	4A/2A	3	Fused/ Electronic	120/230VAC	√	√	√	Lifetime
J7-FPO150-B100E1	Access/ Security/Fire/ CCTV	Access or General Purpose	12&24VDC	12V/4A & 24V/4A	4A/4A	3	Fused/ Electronic	120/230VAC	√	√	√	Lifetime
J7-FPO250-B100E1	Access/ Security/Fire/ CCTV	Access or General Purpose	12&24VDC	12V/4A & 24V/8A	4A/8A	3	Fused/ Electronic	120/230VAC	√	√	√	Lifetime
J7-FPO75/75-E2	Access/ Security/Fire/ CCTV	Access or General Purpose	12&24VDC	12V/6A & 24V/3A	6A/3A	4	Fused/ Electronic	120/230VAC	√	√	√	Lifetime
J7-FPO75/150-E2	Access/ Security/Fire/ CCTV	Access or General Purpose	12&24VDC	12V/6A & 24V/6A	6A/6A	4	Fused/ Electronic	120/230VAC	√	√	√	Lifetime

LifeSafety Power (Cont'd)

ADI Part #	Application	Description	Output Voltage	Current Maximum	Current/ Output	# of Outputs	Output Protection	Input Voltage	Fire Alarm Disconnect	Supervised	UL Listed	Warranty
J7-FPO75-E2M	Access/ Security/Fire/ CCTV	Access or General Purpose	12/24VDC	6A/3A	6A/3A	2	Fused/ Electronic	120/230VAC	√	√	√	Lifetime
J7-FPO150-E2M	Access/ Security/Fire/ CCTV	Access or General Purpose	12/24VDC	12A/6A	12A/6A	2	Fused/ Electronic	120/230VAC	√	√	√	Lifetime
J7-FPO150-E4M	Access/ Security/Fire/ CCTV	Access or General Purpose	12/24VDC	12A/6A	12A/6A	2	Fused/ Electronic	120/230VAC	√	√	√	Lifetime
J7-FPO150-E4M1	Access/ Security/Fire/ CCTV	Access or General Purpose	12/24VDC	12A/6A	12A/6A	2	Fused/ Electronic	120/230VAC	√	√	√	Lifetime
J7-RD75-8	Access/ Security/Fire/ CCTV	Rack Mount Power Supply	12/24VDC	6A/3A	3A	8	Fused	120/230VAC	√	√	√	Lifetime
J7-RD150-8	Access/ Security/Fire/ CCTV	Rack Mount Power Supply	12/24VDC	12A/6A	3A	8	Fused	120/230VAC	√	√	√	Lifetime
J7-RD250-8	Access/ Security/Fire/ CCTV	Rack Mount Power Supply	12/24VDC	20A/10A	3A	8	Fused	120/230VAC	√	√	√	Lifetime
J7-RD75-16	Access/ Security/Fire/ CCTV	Rack Mount Power Supply	12/24VDC	6A/3A	3A	16	Fused	120/230VAC	√	√	√	Lifetime
J7-RD150-16	Access/ Security/Fire/ CCTV	Rack Mount Power Supply	12/24VDC	12A/6A	3A	16	Fused	120/230VAC	√	√	√	Lifetime
J7-RD250-16	Access/ Security/Fire/ CCTV	Rack Mount Power Supply	12/24VDC	20A/10A	3A	16	Fused	120/230VAC	√	√	√	Lifetime
J7-RD75/75-8	Access/ Security/Fire/ CCTV	Rack Mount Power Supply	12&24VDC	12V/6A & 24V/3A	3A	8	Fused	120/230VAC	√	√	√	Lifetime

Securitron

ADI Part #	Application	Description	Output Voltage	Current Maximum	Current/ Output	# of Outputs	Output Protection	Input Voltage	Fire Alarm Disconnect	Supervised	UL Listed	Warranty
SN-AQD3	Access	Power Supply	12 or24VDC field selectable	3/1.5	N/A	1	Fuse	90-240VAC		√	√	Magnacare
SN-AQD34C	Access	Power Supply	12 or24VDC field selectable	3/1.5	0.35A	4	PTC	90-240VAC		√	√	Magnacare
SN-AQD38C	Access	Power Supply	12 or24VDC field selectable	3/1.5	0.35A	8	PTC	90-240VAC		√	√	Magnacare
SN-AQD34F	Access	Power Supply	12 or24VDC field selectable	3/1.5	1A	4	Fuse	90-240VAC		√	√	Magnacare
SN-AQD38F	Access	Power Supply	12 or24VDC field selectable	3/1.5	0.5A	8	Fuse	90-240VAC		√	√	Magnacare
SN-AQD31R	Access	Power Supply	12 or24VDC field selectable	3/1.5	N/A	1	Fuse	90-240VAC	√	√	√	Magnacare
SN-AQD38C1	Access	Power Supply	12 or24VDC field selectable	3/1.5	1.23A	8	PTC	90-240VAC	√	√	√	Magnacare
AQD3-8F8R	Access	Power Supply	12 or24VDC field selectable	3/1.5	0.5A	8	Fuse	90-240VAC	√	√	√	Magnacare
SN-AQD5	Access	Power Supply	12 or24VDC field selectable	5A/3A	N/A	1	Fuse	90-240VAC		√	√	Magnacare
SN-AQD54F	Access	Power Supply	12 or24VDC field selectable	5A/3A	2A	4	Fuse	90-240VAC		√	√	Magnacare
SN-AQD54C	Access	Power Supply	12 or24VDC field selectable	5A/3A	1.4A	4	PTC	90-240VAC		√	√	Magnacare
SN-AQD58F	Access	Power Supply	12 or24VDC field selectable	5A/3A	2A	8	Fuse	90-240VAC		√	√	Magnacare
SN-AQD58C	Access	Power Supply	12 or24VDC field selectable	5A/3A	0.72A	8	PTC	90-240VAC		√	√	Magnacare
SN-AQD58C1	Access	Power Supply	12 or24VDC field selectable	5A/3A	1.23A	8	PTC	90-240VAC	√	√	√	Magnacare
SN-AQD58F8R	Access	Power Supply	12 or24VDC field selectable	5A/3A	0.5A	8	Fuse	90-240VAC	√	√	√	Magnacare
SN-AQM20	Access	Power Supply	12 and/or24VDC field selectable	20A/10A	N/A	2	Fuse	90-240VAC		√		Magnacare
SN-AQM208F	Access	Power Supply	12 and/or24VDC field selectable	20A/10A	4A	8	Fuse	90-240VAC		√		Magnacare
SN-AQM208C	Access	Power Supply	12 and/or24VDC field selectable	20A/10A	3.08A	8	PTC	90-240VAC		√		Magnacare

Securitron (Con't)

ADI Part #	Application	Description	Output Voltage	Current Maximum	Current/ Output	# of Outputs	Output Protection	Input Voltage	Fire Alarm Disconnect	Supervised	UL Listed	Warranty
SN-AQM2016F	Access	Power Supply	12 and/or24VDC field selectable	20A/10A	3A	16	Fuse	90-240VAC		√		Magnacare
SN-AQM2016C	Access	Power Supply	12 and/or24VDC field selectable	20A/10A	1.5A	16	PTC	90-240VAC		√		Magnacare
SN-AQM208F8R	Access	Power Supply	12 and/or24VDC field selectable	20A/10A	2A	8	Fuse	90-240VAC	√	√		Magnacare
SN-AQM208C8R	Access	Power Supply	12 and/or24VDC field selectable	20A/10A	1.04A	8	PTC	90-240VAC	√	√		Magnacare
SN-AQU126	Access	Power Supply	12VDC	6A	N/A	1	Fuse	90-240VAC		√	√	Magnacare
SN-AQU1268C	Access	Power Supply	12VDC	6A	1.5A	8	PTC	90-240VAC		√	√	Magnacare
SN-AQU1268C1	Access	Power Supply	12VDC	6A	1.23A	8	PTC	90-240VAC	√	√	√	Magnacare
SN-AQU1268F8	Access	Power Supply	12VDC	6A	0.5A	8	Fuse	90-240VAC		√	√	Magnacare
SN-AQU1268C8	Access	Power Supply	12VDC	6A	1.04A	8	PTC	90-240VAC		√		Magnacare
SN-AQU128	Access	Power Supply	12VDC	8A		1	Fuse	90-240VAC		√	√	Magnacare
SN-AQU1288C	Access	Power Supply	12VDC	8A	1.5A	8	PTC	90-240VAC		√	√	Magnacare
SN-AQU12816C	Access	Power Supply	12VDC	8A	1.5A	16	PTC	90-240VAC		√	√	Magnacare
SN-AQU1288C1	Access	Power Supply	12VDC	8A	1.23A	8	PTC	90-240VAC	√	√	√	Magnacare
SN-AQU1288F8	Access	Power Supply	12VDC	8A	2A	8	Fuse	90-240VAC	√	√	√	Magnacare
SN-AQU1288C8	Access	Power Supply	12VDC	8A	1.04A	8	PTC	90-240VAC	√	√		Magnacare
SN-AQ12816FR	Access	Power Supply	12VDC	8A	2A	16	Fuse	90-240VAC	√	√	√	Magnacare
SN-AQ12816CR	Access	Power Supply	12VDC	8A	1.04A	16	PTC	90-240VAC	√	√		Magnacare
SN-AQU243	Access	Power Supply	24VDC	3A	N/A	1	Fuse	90-240VAC		√	√	Magnacare
SN-AQU2438F	Access	Power Supply	24VDC	3A	1A	8	Fuse	90-240VAC		√	√	Magnacare
SN-AQU2438C	Access	Power Supply	24VDC	3A	0.72A	8	PTC	90-240VAC		√	√	Magnacare
SN-AQU2438C1	Access	Power Supply	24VDC	3A	1.23A	8	PTC	90-240VAC	√	√	√	Magnacare
SN-AQU243-F8	Access	Power Supply	24VDC	3A	0.5A	8	Fuse	90-240VAC	√	√	√	Magnacare
SN-AQU243-8C8	Access	Power Supply	24VDC	3A	1.04A	8	PTC	90-240VAC	√	√		Magnacare
SN-AQU244	Access	Power Supply	24VDC	4A	N/A	1	Fuse	90-240VAC		√	√	Magnacare
SN-AQU2448C	Access	Power Supply	24VDC	4A	0.72A	8	PTC	90-240VAC		√	√	Magnacare
SN-AQU24416C	Access	Power Supply	24VDC	4A	0.72A	16	PTC	90-240VAC		√	√	Magnacare
SN-AQU2448C1	Access	Power Supply	24VDC	4A	1.23A	8	PTC	90-240VAC	√	√	√	Magnacare
SN-AQU2448F8	Access	Power Supply	24VDC	4A	0.5A	8	Fuse	90-240VAC	√	√	√	Magnacare
SN-AQU2448C8	Access	Power Supply	24VDC	4A	1.04A	8	PTC	90-240VAC	√	√		Magnacare
SN-AQ24416FR	Access	Power Supply	24VDC	4A	0.5A	16	Fuse	90-240VAC	√	√	√	Magnacare
SN-AQ24416CR	Access	Power Supply	24VDC	4A	1.04A	16	PTC	90-240VAC	√	√		Magnacare